

cylinders

ASP Series

Steel Body NFPA Cylinder Line



numatics®

Table of Contents

ASP Series	3-39
Features and Benefits	3
Standard Mounts	4
How to Order	5
Port Size Availability	6
Dimensions	
Rod Ends	7
Large Bore	8
Basic No Mount	9
Large Bore E3 and E4 Mount	10
F1 & F2 Mounts	11
F5 Mount	12
F6 Mount	13
P1 Mounts	14-15
P2 Mounts	16
P3 Mounts	17-18
P4 Mounts	19
S1 Mounts	20-21
S2 Mounts	22-23
S3 Mounts	24
S4 Mounts	25-26
S7 Mounts	27
T Mounts	28-29
X Mounts	30-31
U3 Mount	32
Double Rod Mounts	33-34
Cylinder Position Sensors	35
How to Order - ASP Series Repair Kit	36
How to Order - ASP Series Seal Kit	36
Piston Rod Assembly Kit Removal/Installation Instructions	37
Repair Kit and Seal Kit Removal/Installation Instructions	37
Diagrams	38
Seal Installation Guide	39



The **In Force Cylinder Line** is a heavy-duty, steel body cylinder line that is designed and built to exceed all of your strenuous application requirements. The **ASP Series** is an NFPA Steel Body *pneumatic cylinder line*. The **ASP Series** encompasses many of the same proven design features as our original NFPA Interchangeable cylinder, the A Series. This includes the extra long graphite filled cast iron rod bushing and a standard oversize wear band (located on the rear of the piston). Additionally, we have also included the proven "T" Seal piston seal configuration with carboxilated nitrile with self-lubricating Teflon® compound. These are just a sample of things that make the **ASP Series** the *Superior Steel Body air cylinder line*.

Tube

The steel **tube** is honed to a fine micro-finish and then surface hardened by a Nitrotec process. Nitrotec is an innovative process that creates a thin (.001") uniform and extremely hard (64 to 71 Rc) iron nitride layer infused with a film of iron oxide. This process provides a smooth corrosion free sealing surface and superior abrasion resistance.

End Caps

The **end caps** are accurately machined from precision square steel blocks. They also have a black oxide finish to protect from corrosion. Additionally, a recess on the piston-mating surface (at both ends) enables the air to work on a larger piston area for effortless breakaway (even at low pressures).

Rod Bushing

The ASP Series (1-1/2" through 8") includes a graphite filled, cast iron **rod bushing** that is extra long in length. Graphite filling offers the best bearing surface when using a hard chrome plated piston rod. Cast iron provides maximum resistance against wear. The added length adds superior alignment and support of the piston rod as well as provides maximum load bearing support. Sizes 10" through 14" bores include an extra long bronze rod bushing.

Rod Seal

The carboxilated nitrile with Teflon® compound **rod seal** is self-lubricating and durable. The rounded lip design ensures proper sealing and long life.

Rod Wiper

The standard **rod wiper** construction is highly durable polyurethane.

Piston Rod

The high strength steel (100,000 psi minimum yield) **piston rod** has a ground, polished, and chrome plated surface. This surface provides maximum life for both the rod bushing and the seals.

Bushing Retainer

The **bushing retainer** allows cartridge removal (cylinder repair) without complete disassembly-(except X1 and X3 mounts). Full-face retainer on 1-1/2" through 2-1/2" bore. Round retainer on 3-1/4" through 14" bore. Both the Full-face and round retainer are steel construction.

Tie-Rods

The **tie-rods** are 100,000 psi minimum yield steel for maximum holding power. They are roll formed for superior strength and engagement (up to 5/8").

Piston Seal

The **piston seal** is carboxilated nitrile with Teflon® compound for self-lubricating. The "T" seal with back-up rings prevents rolling and seals at all pressures.

Wear Band

The **wear band** is a stable, lubricating strip located on the piston. We separated the load bearing points by locating the wear band at the rear of the piston. This maximizes column strength at full-extension.



Piston

The solid aluminum alloy **piston** is strong and durable.

Cushion Seal

The floating **cushion seal** design enables rapid stroke reversal by providing instantaneous full-flow to the piston. Each cushion has a flush, retained adjustment needle.

Tube End Seal

The **tube end seals** are compression type and reusable.

Ports

Our enhanced **port** design enables the cylinder to work more efficiently. The use of precise machining depths and tool shape allows a smooth flow path into and out of the cylinder.

Teflon® is a registered trademark of DuPont™.

Standard Specifications:

- Meets NFPA specifications
- Bore sizes from 1-1/2" through 14"
- Piston rod diameters from 5/8" to 3-1/2"
- Nominal pressure rating is 250 psi air
- Standard temperature -10° F to 165° F (-23° C to 74° C)
- All steel construction, except piston (aluminum)
- NPTF ports
- Flexible port locating
- Solid one-piece S2, P1, P3 and U3 head and cap (no welded lugs on 1-1/2" through 8" bores).




ASP Series Steel Body NFPA

numatics®

Standard ASP Series Mounts - Centerline Mounts


X0 Mount

Basic No Mount




X1 Mount

Extended Tie Rods – Both Ends




X2 Mount

Extended Tie Rods – Cap End




X3 Mount

Extended Tie Rods – Head End




F1 Mount

Head Rectangular Flange




F2 Mount

Cap Rectangular Flange




F5 Mount

Head Square Flange
1-1/2" to 6" Bore




F6 Mount

Cap Square Flange
1-1/2" to 6" Bore




E3 Mount

Head Square Mount




E4 Mount

Cap Square Mount



DA Mount


Double Rod End



Pivot Mounts


P1 Mount

Fixed Clevis




P2 Mount

Detachable Clevis




P3 Mount

Fixed Eye




P4 Mount

Detachable Eye




T1 Mount

Head Trunnion




T2 Mount

Cap Trunnion



T4 Mount


Intermediate Trunnion



Foot Mounts


S1 Mount

Angle Mount




S2 Mount

Side Lugs




S3 Mount

Centerline Lugs




S4 Mount

Bottom Tapped



S7 Mount

End Lugs





How To Order

P1 ASP L-04 A 1 1 D-C AA 1 1

Cylinder Mounting

E3* = Head Square
E4* = Cap Square
F1** = Front Flange
F2** = Rear Flange
P1 = Fixed Clevis
P2 = Detachable Clevis
P3 = Fixed Eye
P4 = Detachable Eye
S1 = Angle Mount
S2** = Side Lugs
S3 = Centerline Lugs
S4** = Bottom Tapped
S7 = End Lugs
T1 = Head Trunnion
T2 = Cap Trunnion
T4** = Mid Trunnion
X0 = Basic No Mount
X1 = Extended Tie Rods (Both Ends)
X2 = Cap Extended Tie Rods
X3 = Head Extended Tie Rods
F5** = Head Square Flange
F6** = Cap Square Flange

*8"-14" Bore Only

**1-1/2"-6" Bore Only

Cylinder Type

ASP = Steel Body NFPA Pneumatic
Cylinder Line

Cylinder Bore

K = 1.50 R = 4.00 X = 10.00
L = 2.00 T = 5.00 Y = 12.00
M = 2.50 U = 6.00 B = 14.00
P = 3.25 W = 8.00

Note: Consult factory for strokes greater than 99."

Full Inches of Stroke

00 = 0" Stroke
01 = 1" Stroke
02 = 2" Stroke
03 = 3" Stroke
04 = 4" Stroke
05 = 5" Stroke
99 = 99" Stroke

Fractional Inches of Stroke

A = 0" E = 1/4" I = 1/2" M = 3/4"
B = 1/16" F = 5/16" J = 9/16" N = 13/16"
C = 1/8" G = 3/8" K = 5/8" O = 7/8"
D = 3/16" H = 7/16" L = 11/16" P = 15/16"

Rod Diameter

1 = 0.625" 5 = 2.000"
2 = 1.000" 6 = 2.500"
3 = 1.375" 7 = 3.000"
4 = 1.750" 8 = 3.500"

Cap Cylindicator Position

(Leave blank if NS or CR is not used.)

Head Cylindicator Position

(Leave blank if NS or CR is not used.)

Options


AA = No Options
EB = Silencer Bumpers
KA = Stroke Adjuster
DA = Double Rod End
RB = Rod Boot
GA = High Temp Rod Boot
MA = Metallic Rod Scraper
LB = Low Breakaway
RA* = Save Air Stroke Adjust
SA = Stainless Rod
ST = Stainless Tie Rods
SS = Stainless Rod and Tie Rods
VA** = Viton Seals
1A* = Rod Extension
2A* = Thread Extension
3A = Rod Stud
4A* = Stop Tube
4D* = Double Piston Stop Tube
FB = Four Wrench Flats
JN = Jam Nut
PA = Polypak Rod Seal
PP = Polypak Piston
NA = Nickel Plated
NS = **Cylindicator Ready "No Stroke to Go"**
CR = **Cylindicator Ready "Stroke to Go"**

* Specify length

** Viton is not recommended for non-lube service

Note: For additional and combination options, consult factory for details.

Cylinder Orientation



Cushions

Position	1	2	3	4	Fixed
No Cushions	A	A	A	A	A
Head & Cap	B	C	D	E	Y
Head Only	F	G	H	J	W
Cap Only	K	L	M	N	V

NOTE: Standard port location is position 1 and Standard cushion location is position 2.

Port Size

Position	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"
1	B	C	D	E	F	G	1
2	H	I	J	K	L	M	2
3	N	O	P	Q	R	S	3
4	T	U	V	W	X	Y	4

Rod End Style

1 = Style #1 Male Thread
2 = Style #2 Male Thread
3 = Style #3 Female Thread
4 = Special Rod End (Specify Threads)

Rod End Styles, Diameters and Threads

Diameter	Style #1 Standard Male	Style #2 Optional Male	Style #3 Optional Female
0.625	7/16-20	1/2-20	7/16-20
1.000	3/4-16	7/8-14	3/4-16
1.375	1-14	1 1/4-12	1-14
1.750	1 1/4-12	1 1/2-12	1 1/4-12
2.000	1 1/2-12	1 3/4-12	1 1/2-12
2.500	1 7/8-12	2 1/4-12	1 7/8-12
3.000	2 1/4-12	2 3/4-12	2 1/4-12
3.500	2 1/2-12	3 1/4-12	2 1/2-12

Rod Diameter by Bore Size


Bore	Standard Diameter	1st Oversized	2nd Oversized	3rd Oversized
1-1/2"	0.625	1.000	N/A	N/A
2"	0.625	1.000	1.375	N/A
2-1/2"	0.625	1.000	1.375	1.750
3-1/4"	1.000	1.375	1.750	2.000
4"	1.000	1.375	1.750	2.000
5"	1.000	1.375	1.750	2.000
6"	1.375	1.750	2.000	2.500
8"	1.375	1.750	2.000	2.500
10"	1.750	2.000	2.500	3.000
12"	2.000	2.500	3.000	3.500
14"	2.500	3.000	3.500	N/A




ASP Series Steel Body NFPA

numatics®

Port Size Availability



Cylinder
Port Orientation

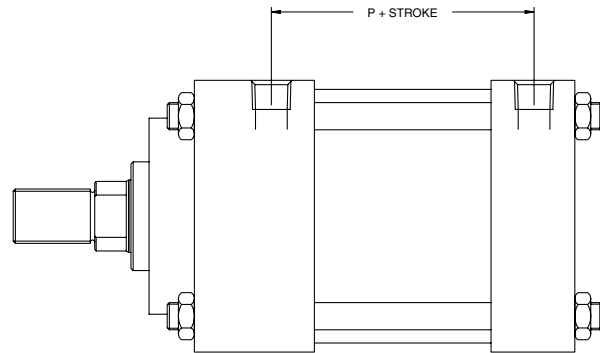

The above drawing represents port location # 1.




Note: Larger port sizes per given bore may require slight changes in the "P" dimension

BORE	ROD	1/8 NPTF	1/4 NPTF	3/8 NPTF	1/2 NPTF	3/4 NPTF	1 NPTF	1-1/4 NPTF
1-1/2	5/8	◆	◆	◆	N/A	N/A	N/A	N/A
	1	◆	◆	N/A	N/A	N/A	N/A	N/A
2	5/8	◆	◆	◆	◆	N/A	N/A	N/A
	1	◆	◆	◆	N/A	N/A	N/A	N/A
	1-3/8	◆	◆	◆	N/A	N/A	N/A	N/A
2-1/2	5/8	◆	◆	◆	◆	N/A	N/A	N/A
	1	◆	◆	◆	◆	N/A	N/A	N/A
	1-3/8	◆	◆	◆	N/A	N/A	N/A	N/A
	1-3/4	◆	◆	◆	N/A	N/A	N/A	N/A
3-1/4	1	◆	◆	◆	◆	◆	N/A	N/A
	1-3/8	◆	◆	◆	◆	◆	N/A	N/A
	1-3/4	◆	◆	◆	◆	N/A	N/A	N/A
	2	◆	◆	◆	◆	N/A	N/A	N/A
4	1	◆	◆	◆	◆	◆	N/A	N/A
	1-3/8	◆	◆	◆	◆	◆	N/A	N/A
	1-3/4	◆	◆	◆	◆	◆	N/A	N/A
	2	◆	◆	◆	◆	◆	N/A	N/A
5	1	◆	◆	◆	◆	◆	N/A	N/A
	1-3/8	◆	◆	◆	◆	◆	N/A	N/A
	1-3/4	◆	◆	◆	◆	◆	N/A	N/A
	2	◆	◆	◆	◆	◆	N/A	N/A
6	1-3/8	◆	◆	◆	◆	◆	◆	N/A
	1-3/4	◆	◆	◆	◆	◆	◆	N/A
	2	◆	◆	◆	◆	◆	N/A	N/A
	2-1/2	◆	◆	◆	◆	◆	N/A	N/A
8	1-3/8	◆	◆	◆	◆	◆	◆	N/A
	1-3/4	◆	◆	◆	◆	◆	◆	N/A
	2	◆	◆	◆	◆	◆	◆	N/A
	2-1/2	◆	◆	◆	◆	◆	◆	N/A
10	1-3/4	◆	◆	◆	◆	◆	◆	N/A
	2	◆	◆	◆	◆	◆	◆	N/A
	2-1/2	◆	◆	◆	◆	◆	◆	N/A
	3	◆	◆	◆	◆	◆	N/A	N/A
12	2	◆	◆	◆	◆	◆	◆	◆
	2-1/2	◆	◆	◆	◆	◆	◆	◆
	3	◆	◆	◆	◆	◆	◆	N/A
	3-1/2	◆	◆	◆	◆	◆	◆	N/A
14	2-1/2	◆	◆	◆	◆	◆	◆	◆
	3	◆	◆	◆	◆	◆	◆	◆
	3-1/2	◆	◆	◆	◆	◆	◆	◆



Standard and Optional Rod Ends

1-1/2" – 6" Bore

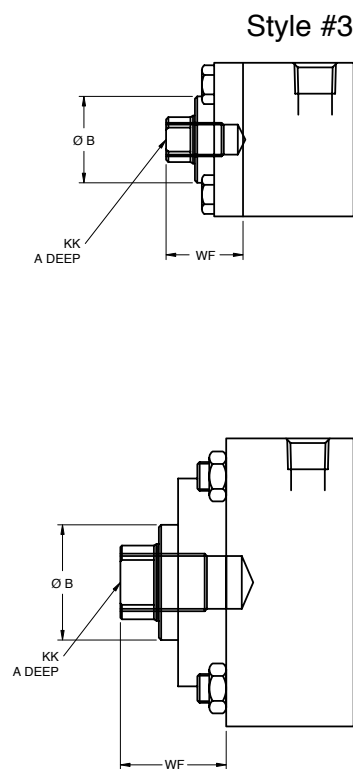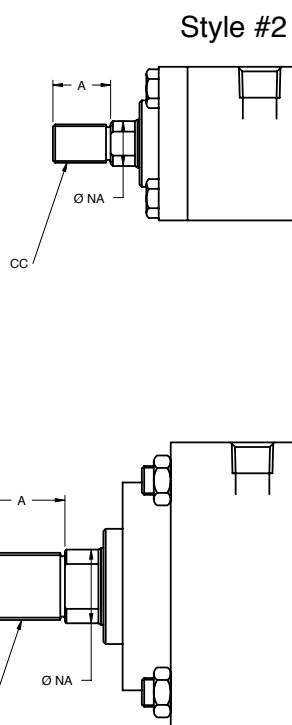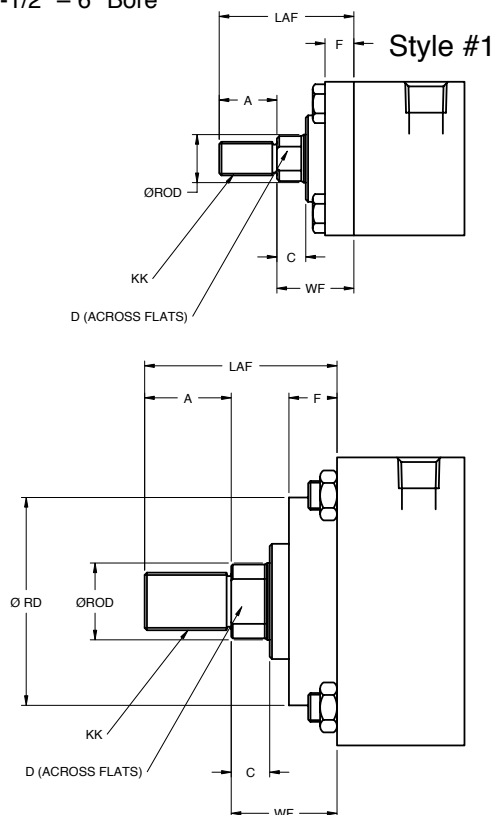

Bore	Rod	KK(1)	CC(2)	KK(3)	A	B	C	D	NA	LAF	WF	F
1-1/2	5/8	7/16-20	1/2-20	7/16-20	0.750	1.125	0.375	0.500	0.585	1.750	1.000	0.375
	1	3/4-16	7/8-14	3/4-16	1.125	1.400	0.500	0.813	0.960	2.500	1.375	0.375
2	5/8	7/16-20	1/2-20	7/16-20	0.750	1.125	0.375	0.500	0.585	1.750	1.000	0.375
	1	3/4-16	7/8-14	3/4-16	1.125	1.500	0.500	0.813	0.960	2.500	1.375	0.375
	1-3/8	1-14	1 1/4-12	1-14	1.625	2.000	0.625	1.125	1.313	3.250	1.625	0.375
2-1/2	5/8	7/16-20	1/2-20	7/16-20	0.750	1.125	0.375	0.500	0.585	1.750	1.000	0.375
	1	3/4-16	7/8-14	3/4-16	1.125	1.500	0.500	0.813	0.960	2.500	1.375	0.375
	1-3/8	1-14	1 1/4-12	1-14	1.625	2.000	0.625	1.125	1.313	3.250	1.625	0.375
	1-3/4	1 1/4-12	1 1/2-12	1 1/4-12	2.000	2.375	0.750	1.500	1.688	3.875	1.875	0.375
3-1/4	1	3/4-16	7/8-14	3/4-16	1.125	1.500	0.500	0.813	0.960	2.500	1.375	0.625
	1-3/8	1-14	1 1/4-12	1-14	1.625	2.000	0.625	1.125	1.313	3.250	1.625	0.625
	1-3/4	1 1/4-12	1 1/2-12	1 1/4-12	2.000	2.375	0.750	1.500	1.688	3.875	1.875	0.625
	2	1 1/2-12	1 3/4-12	1 1/2-12	2.250	2.625	0.875	1.750	1.940	4.250	2.000	0.625
	1	3/4-16	7/8-14	3/4-16	1.125	1.500	0.500	0.813	0.960	2.500	1.375	0.625
4	1-3/8	1-14	1 1/4-12	1-14	1.625	2.000	0.625	1.125	0.131	3.250	1.625	0.625
	1-3/4	1 1/4-12	1 1/2-12	1 1/4-12	2.000	2.375	0.750	1.500	1.688	3.875	1.875	0.625
	2	1 1/2-12	1 3/4-12	1 1/2-12	2.250	2.625	0.875	1.750	1.940	4.250	2.000	0.625
	1	3/4-16	7/8-14	3/4-16	1.125	1.500	0.500	0.813	0.960	2.500	1.375	0.625
5	1-3/8	1-14	1 1/4-12	1-14	1.625	2.000	0.625	1.125	1.313	3.250	1.625	0.625
	1-3/4	1 1/4-12	1 1/2-12	1 1/4-12	2.000	2.375	0.750	1.500	1.688	3.875	1.875	0.625
	2	1 1/2-12	1 3/4-12	1 1/2-12	2.250	2.625	0.875	1.750	1.940	4.250	2.000	0.625
	1-3/8	1-14	1 1/4-12	1-14	1.625	2.000	0.625	1.125	1.313	3.250	1.625	0.750
6	1-3/4	1 1/4-12	1 1/2-12	1 1/4-12	2.000	2.375	0.750	1.500	1.688	3.875	1.875	0.750
	2	1 1/2-12	1 3/4-12	1 1/2-12	2.250	2.625	0.875	1.750	1.940	4.250	2.000	0.750
	2-1/2	1 7/8-12	2 1/4-12	1 7/8-12	3.000	3.125	1.000	2.060	2.440	5.250	2.250	0.750




ASP Series Steel Body NFPA

numatics®


Large Bore

8" – 14" Bore: Standard and Optional Rod Ends


Style #1

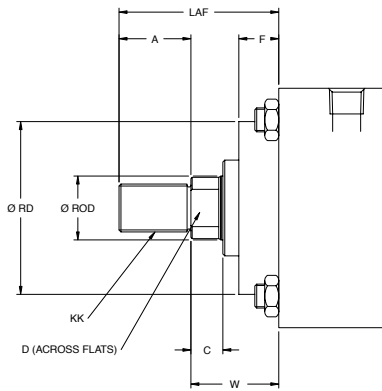

Style #2



Style #3





BORE	ROD	KK(1)	CC(2)	KK(3)	A	B	C	D	NA	LAF	W	F
8	1-3/8	1-14	1 1/4-12	1-14	1.625	2.000	0.625	1.125	1.313	3.250	1.625	0.750
	1-3/4	1 1/4-12	1 1/2-12	1 1/4-12	2.000	2.375	0.750	1.500	1.688	3.875	1.875	0.750
	2	1 1/2-12	1 3/4-12	1 1/2-12	2.250	2.625	0.875	1.750	1.940	4.250	2.000	0.750
	2-1/2	1 7/8-12	2 1/4-12	1 7/8-12	3.000	3.125	1.000	2.060	2.440	5.250	2.250	0.750
10	1-3/4	1 1/4-12	1 1/2-12	1 1/4-12	2.000	3.125	0.750	1.500	1.690	3.875	1.875	0.750
	2	1 1/2-12	1 3/4-12	1 1/2-12	2.250	3.125	0.875	1.750	1.940	4.250	2.000	0.750
	2-1/2	1 7/8-12	2 1/4-12	1 7/8-12	3.000	3.125	1.000	2.060	2.440	5.250	2.250	0.750
	3	2 1/4-12	2 3/4-12	2 1/4-12	3.500	3.750	1.000	2.625	2.875	5.750	2.250	0.750
12	2	1 1/2-12	1 3/4-12	1 1/2-12	2.250	3.125	0.875	1.750	1.940	4.250	2.000	0.750
	2-1/2	1 7/8-12	2 1/4-12	1 7/8-12	3.000	3.125	1.000	2.060	2.440	5.250	2.250	0.750
	3	2 1/4-12	2 3/4-12	2 1/4-12	3.500	3.750	1.000	2.625	2.875	5.750	2.250	0.750
	3-1/2	2 1/2-12	3 1/4-12	2 1/2-12	3.500	4.250	1.000	3.000	3.438	5.750	2.250	0.750
14	2-1/2	1 7/8-12	2 1/4-12	1 7/8-12	3.000	3.125	1.000	2.060	2.440	5.250	2.250	0.750
	3	2 1/4-12	2 3/4-12	2 1/4-12	3.500	3.750	1.000	2.625	2.875	5.750	2.250	0.750
	3-1/2	2 1/2-12	3 1/4-12	2 1/2-12	3.500	4.250	1.000	3.000	3.438	5.750	2.250	0.750




Basic No Mount Cylinder

1-1/2" through 2-1/2" Bore

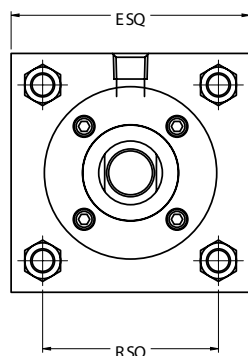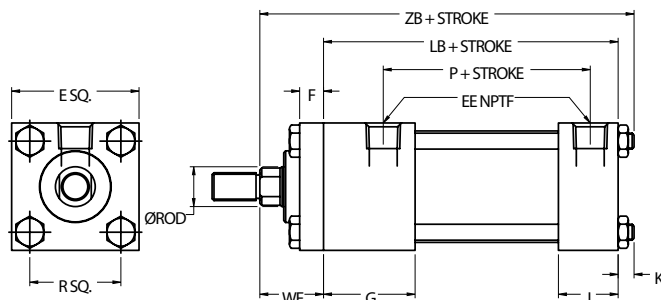

3-1/4" through 6" Bore

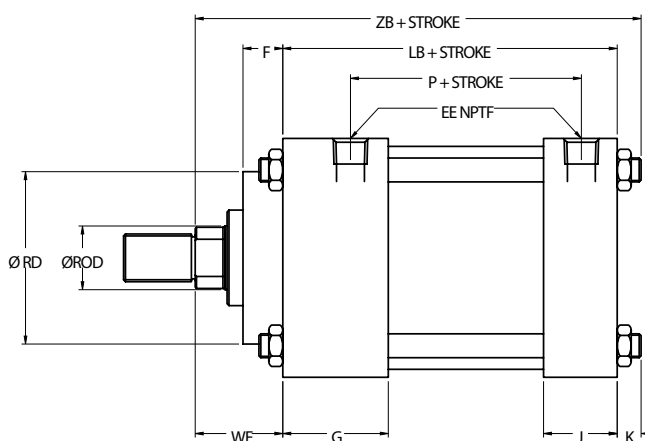

BORE	ROD	E	EE	F	G	J	K	LB	P	R	RD	WF	ZB
1-1/2	5/8	2.000	0.375	0.375	1.500	1.000	0.250	3.625	2.250	1.430	N/A	1.000	4.875
	1	2.000	0.250	0.375	1.500	1.000	0.250	3.625	2.103	1.430	N/A	1.375	5.250
2	5/8	2.500	0.375	0.375	1.500	1.000	0.313	3.625	2.250	1.840	N/A	1.000	4.938
	1	2.500	0.375	0.375	1.500	1.000	0.313	3.625	2.250	1.840	N/A	1.375	5.313
	1-3/8	2.500	0.375	0.375	1.500	1.000	0.313	3.625	2.250	1.840	N/A	1.625	5.563
2-1/2	5/8	3.000	0.375	0.375	1.500	1.000	0.313	3.750	2.375	2.190	N/A	1.000	5.062
	1	3.000	0.375	0.375	1.500	1.000	0.313	3.750	2.375	2.190	N/A	1.375	5.438
	1-3/8	3.000	0.375	0.375	1.500	1.000	0.313	3.750	2.375	2.190	N/A	1.625	5.688
	1-3/4	3.000	0.375	0.375	1.500	1.000	0.313	3.750	2.375	2.190	N/A	1.875	5.938
3-1/4	1	3.750	0.500	0.625	1.750	1.250	0.375	4.250	2.625	2.760	2.706	1.375	6.000
	1-3/8	3.750	0.500	0.625	1.750	1.250	0.375	4.250	2.625	2.760	3.110	1.625	6.250
	1-3/4	3.750	0.500	0.625	1.750	1.250	0.375	4.250	2.625	2.760	N/A	1.875	6.500
	2	3.750	0.500	0.625	1.750	1.250	0.375	4.250	2.625	2.760	N/A	2.000	6.625
4	1	4.500	0.500	0.625	1.750	1.250	0.375	4.250	2.625	3.320	2.706	1.375	6.000
	1-3/8	4.500	0.500	0.625	1.750	1.250	0.375	4.250	2.625	3.320	3.110	1.625	6.250
	1-3/4	4.500	0.500	0.625	1.750	1.250	0.375	4.250	2.625	3.320	3.788	1.875	6.500
	2	4.500	0.500	0.625	1.750	1.250	0.375	4.250	2.625	3.320	N/A	2.000	6.625
5	1	5.500	0.500	0.625	1.750	1.250	0.500	4.500	2.875	4.100	2.706	1.375	6.375
	1-3/8	5.500	0.500	0.625	1.750	1.250	0.500	4.500	2.875	4.100	3.110	1.625	6.625
	1-3/4	5.500	0.500	0.625	1.750	1.250	0.500	4.500	2.875	4.100	3.788	1.875	6.875
	2	5.500	0.500	0.625	1.750	1.250	0.500	4.500	2.875	4.100	4.250	2.000	7.000
6	1-3/8	6.500	0.750	0.750	2.000	1.500	0.500	5.000	3.125	4.880	3.110	1.625	7.125
	1-3/4	6.500	0.750	0.750	2.000	1.500	0.500	5.000	3.125	4.880	3.788	1.875	7.375
	2	6.500	0.750	0.750	2.000	1.500	0.500	5.000	3.125	4.880	4.250	2.000	7.500
	2-1/2	6.500	0.750	0.750	2.000	1.500	0.500	5.000	3.125	4.880	5.500	2.500	8.000




ASP Series Steel Body NFPA

numatics®


Large Bore E3 and E4 Mount

8" through 14" Bore

E3 Mount

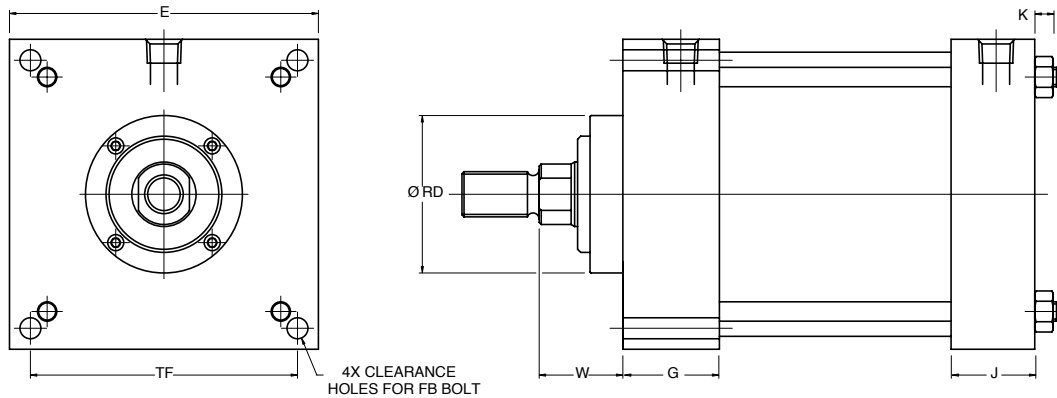

E4 Mount

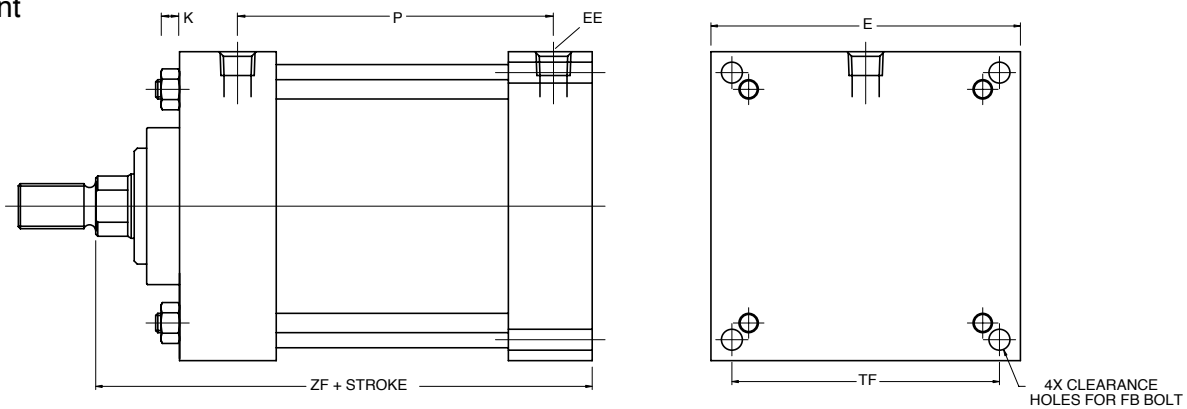


BORE	ROD	E	EE	F	FB	G	J	K	LB	P	RD	TF	W	ZF
8	1-3/8	8.500	0.750	0.625	0.625	2.000	1.500	0.625	5.125	3.250	3.110	7.580	1.625	6.750
	1-3/4	8.500	0.750	0.750	0.625	2.000	1.500	0.625	5.125	3.250	3.788	7.580	1.875	7.000
	2	8.500	0.750	0.750	0.625	2.000	1.500	0.625	5.125	3.250	4.250	7.580	2.000	7.125
	2-1/2	8.500	0.750	0.750	0.625	2.000	1.500	0.625	5.125	3.250	5.500	7.580	2.250	7.375
10	1-3/4	10.625	1.000	0.750	0.750	2.250	2.000	0.750	6.375	4.125	3.788	9.400	1.875	8.250
	2	10.625	1.000	0.750	0.750	2.250	2.000	0.750	6.375	4.125	4.250	9.400	2.000	8.375
	2-1/2	10.625	1.000	0.750	0.750	2.250	2.000	0.750	6.375	4.125	5.500	9.400	2.250	8.625
	3	10.625	1.000	0.750	0.750	2.250	2.000	0.750	6.375	4.125	7.500	9.400	2.250	8.625
12	2	12.750	1.000	0.750	0.750	2.250	2.000	0.750	6.875	4.625	4.250	11.100	2.000	8.875
	2-1/2	12.750	1.000	0.750	0.750	2.250	2.000	0.750	6.875	4.625	5.500	11.100	2.250	9.125
	3	12.750	1.000	0.750	0.750	2.250	2.000	0.750	6.875	4.625	7.500	11.100	2.250	9.125
	3-1/2	12.750	1.000	0.750	0.750	2.250	2.000	0.750	6.875	4.625	7.500	11.100	2.250	9.125
14	2-1/2	14.750	1.250	0.750	0.875	2.750	2.250	0.875	8.125	5.500	5.500	12.870	2.250	10.375
	3	14.750	1.250	0.750	0.875	2.750	2.250	0.875	8.125	5.500	7.500	12.870	2.250	10.375
	3-1/2	14.750	1.250	0.750	0.875	2.750	2.250	0.875	8.125	5.500	7.500	12.870	2.250	10.375




F1 and F2 Mounts


Mount Code F1

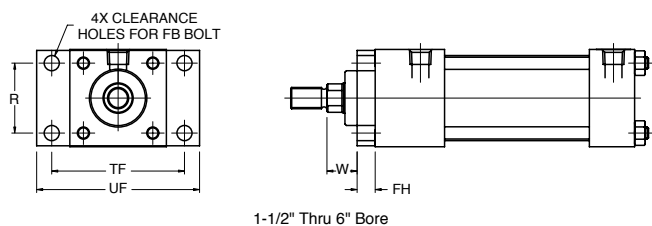

Mount Code F2

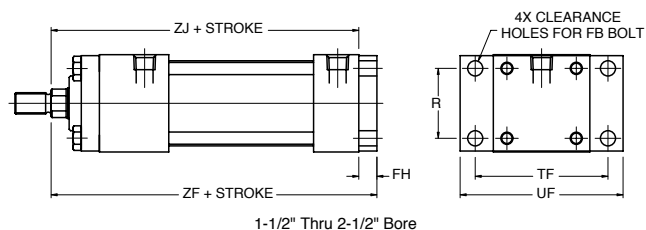

Mount Code F2

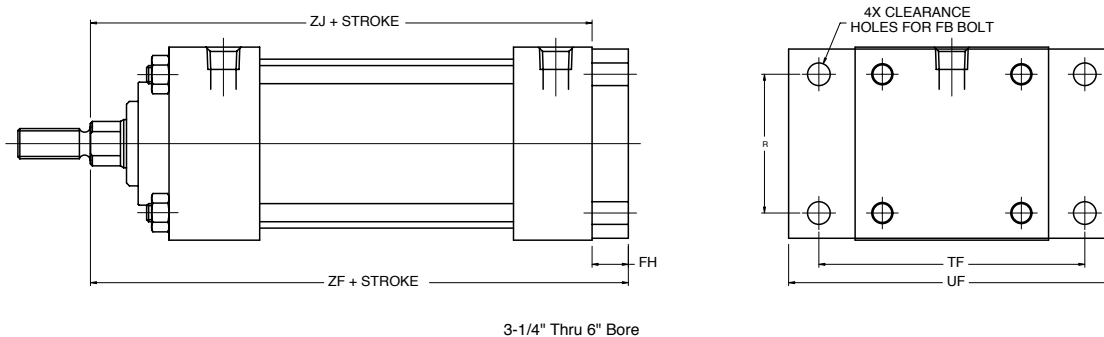

BORE	ROD	FB	FH	R	TF	UF	W	ZJ	ZF
1-1/2	5/8	0.250	0.380	1.430	2.750	3.380	0.630	4.630	5.000
	1	0.250	0.380	1.430	2.750	3.380	1.000	5.000	5.380
2	5/8	0.310	0.380	1.840	3.380	4.130	0.630	4.630	5.000
	1	0.310	0.380	1.840	3.380	4.130	1.000	5.000	5.380
	1-3/8	0.310	0.380	1.840	3.380	4.130	1.250	5.250	5.630
2-1/2	5/8	0.310	0.380	2.190	3.880	4.630	0.630	4.750	5.130
	1	0.310	0.380	2.190	3.880	4.630	1.000	5.130	5.500
	1-3/8	0.310	0.380	2.190	3.880	4.630	1.250	5.380	5.750
3-1/4	1-3/4	0.310	0.380	2.190	3.880	4.630	1.500	5.630	6.000
	1	0.380	0.630	2.760	4.690	5.500	0.750	5.630	6.250
	1-3/8	0.380	0.630	2.760	4.690	5.500	1.000	5.880	6.500
	1-3/4	0.380	0.630	2.760	4.690	5.500	1.250	6.130	6.750
4	2	0.380	0.630	2.760	4.690	5.500	1.380	6.250	6.880
	1	0.380	0.630	3.320	5.440	6.250	0.750	5.630	6.250
	1-3/8	0.380	0.630	3.320	5.440	6.250	1.000	5.880	6.500
	1-3/4	0.380	0.630	3.320	5.440	6.250	1.250	6.130	6.750
5	2	0.380	0.630	3.320	5.440	6.250	1.380	6.250	6.880
	1	0.500	0.630	4.100	6.630	7.630	0.750	5.880	6.500
	1-3/8	0.500	0.630	4.100	6.630	7.630	1.000	6.130	6.750
	1-3/4	0.500	0.630	4.100	6.630	7.630	1.250	6.380	7.000
6	2	0.500	0.630	4.100	6.630	7.630	1.380	6.500	7.130
	1-3/8	0.500	0.750	4.880	7.630	8.630	0.880	6.630	7.380
	1-3/4	0.500	0.750	4.880	7.630	8.630	1.130	6.880	7.630
	2	0.500	0.750	4.880	7.630	8.630	1.250	7.000	7.750
	2-1/2	0.500	0.750	4.880	7.630	8.630	1.500	7.250	8.000





ASP Series Steel Body NFPA

numatics®

F5 Mount

Mount Code F5

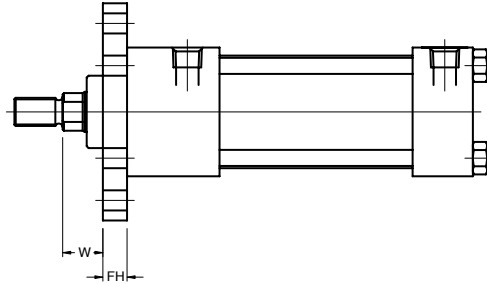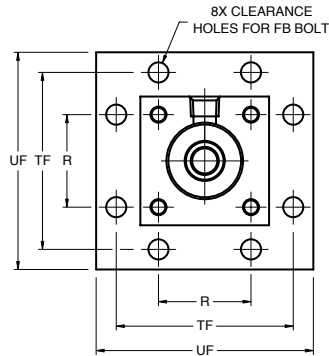


1-1/2" Thru 6" Bore

BORE	ROD	FB	FH	R	TF	UF	W
1-1/2	5/8	0.25	0.38	1.43	2.75	3.38	0.63
	1	0.25	0.38	1.43	2.75	3.38	1.00
2	5/8	0.31	0.38	1.84	3.38	4.13	0.63
	1	0.31	0.38	1.84	3.38	4.13	1.00
	1-3/8	0.31	0.38	1.84	3.38	4.13	1.25
2-1/2	5/8	0.31	0.38	2.19	3.88-	4.63	0.63
	1	0.31	0.38	2.19	3.88	4.63	1.00
	1-3/8	0.31	0.38	2.19	3.88	4.63	1.25
	1-3/4	0.31	0.38	2.19	3.88	4.63	1.50
3-1/4	1	0.38	0.63	2.76	4.69	5.50	0.75
	1-3/8	0.38	0.63	2.76	4.69	5.50	1.00
	1-3/4	0.38	0.63	2.76	4.69	5.50	1.25
	2	0.38	0.63	2.76	4.69	5.50	1.38
4	1	0.38	0.63	3.32	5.44	6.25	0.75
	1-3/8	0.38	0.63	3.32	5.44	6.25	1.00
	1-3/4	0.38	0.63	3.32	5.44	6.25	1.25
	2	0.38	0.63	3.32	5.44	6.25	1.38
5	1	0.50	0.63	4.10	6.63	7.63	0.75
	1-3/8	0.50	0.63	4.10	6.63	7.63	1.00
	1-3/4	0.50	0.63	4.10	6.63	7.63	1.25
	2	0.50	0.63	4.10	6.63	7.63	1.38
6	1-3/8	0.50	0.75	4.88	7.63	8.63	0.88
	1-3/4	0.50	0.75	4.88	7.63	8.63	1.13
	2	0.50	0.75	4.88	7.63	8.63	1.25
	2-1/2	0.50	0.75	4.88	7.63	8.63	1.50




F6 Mount

Mount Code F6

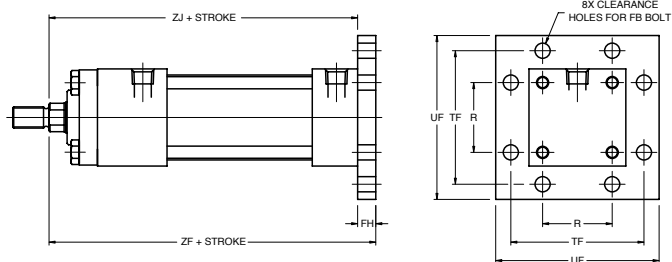

1-1/2" Thru 2-1/2" Bore

Mount Code F6

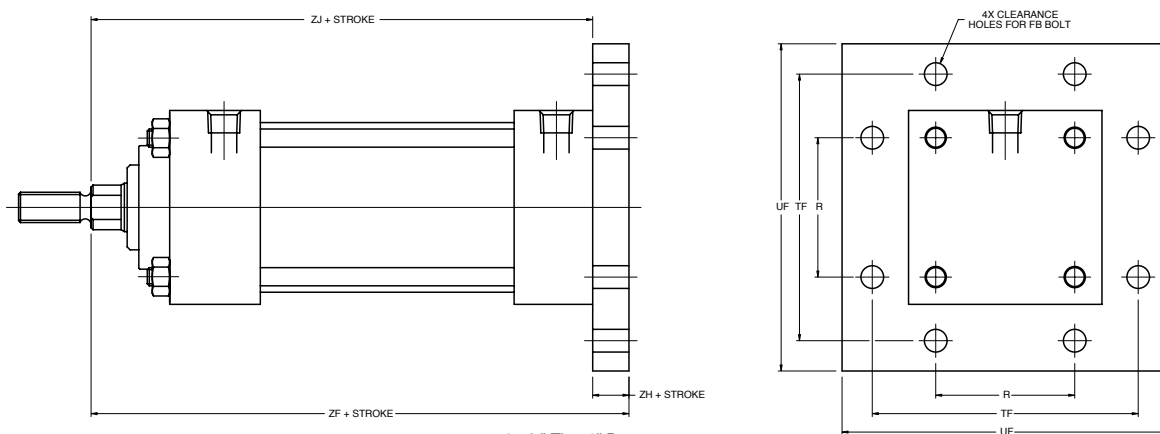

3-1/4" Thru 6" Bore



BORE	ROD	FB	FH	R	TF	UF	ZJ	ZF
1-1/2	5/8	0.25	0.38	1.43	2.75	3.38	4.63	5.00
	1	0.25	0.38	1.43	2.75	3.38	5.00	5.38
2	5/8	0.31	0.38	1.84	3.38	4.13	4.63	5.00
	1	0.31	0.38	1.84	3.38	4.13	5.00	5.38
	1-3/8	0.31	0.38	1.84	3.38	4.13	5.25	5.63
2-1/2	5/8	0.31	0.38	2.19	3.88	4.63	4.75	5.13
	1	0.31	0.38	2.19	3.88	4.63	5.13	5.50
	1-3/8	0.31	0.38	2.19	3.88	4.63	5.38	5.75
	1-3/4	0.31	0.38	2.19	3.88	4.63	5.63	6.00
3-1/4	1	0.38	0.63	2.76	4.69	5.50	5.63	6.25
	1-3/8	0.38	0.63	2.76	4.69	5.50	5.88	6.50
	1-3/4	0.38	0.63	2.76	4.69	5.50	6.13	6.75
	2	0.38	0.63	2.76	4.69	5.50	6.25	6.88
4	1	0.38	0.63	3.32	5.44	6.25	5.63	6.25
	1-3/8	0.38	0.63	3.32	5.44	6.25	5.88	6.50
	1-3/4	0.38	0.63	3.32	5.44	6.25	6.13	6.75
	2	0.38	0.63	3.32	5.44	6.25	6.25	6.88
5	1	0.50	0.63	4.10	6.63	7.63	5.88	6.50
	1-3/8	0.50	0.63	4.10	6.63	7.63	6.13	6.75
	1-3/4	0.50	0.63	4.10	6.63	7.63	6.38	7.00
	2	0.50	0.63	4.10	6.63	7.63	6.50	7.13
6	1-3/8	0.50	0.75	4.88	7.63	8.63	6.63	7.38
	1-3/4	0.50	0.75	4.88	7.63	8.63	6.88	7.63
	2	0.50	0.75	4.88	7.63	8.63	7.00	7.75
	2-1/2	0.50	0.75	4.88	7.63	8.63	7.25	8.00



ASP Series Steel Body NFPA

numatics®


P1 Mounts

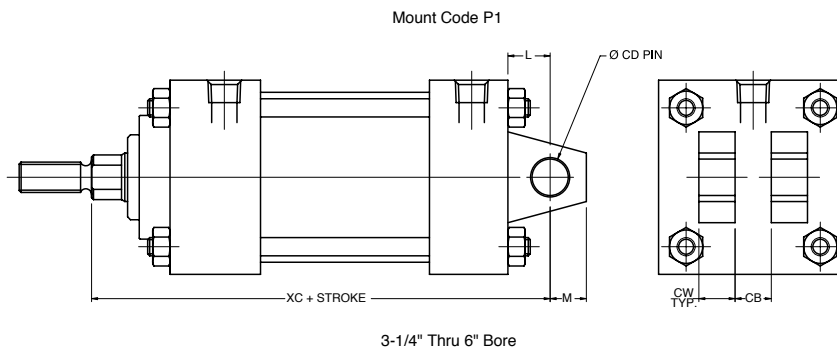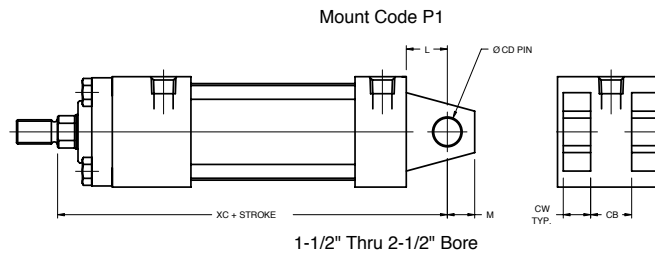

BORE	ROD	CB	CD	CW	L	M	XC
1-1/2	5/8	0.75	0.500	0.50	0.75	0.50	5.38
	1	0.75	0.500	0.50	0.75	0.50	5.75
2	5/8	0.75	0.500	0.50	0.75	0.50	5.38
	1	0.75	0.500	0.50	0.75	0.50	5.75
	1-3/8	0.75	0.500	0.50	0.75	0.50	6.00
2-1/2	5/8	0.75	0.500	0.50	0.75	0.50	5.50
	1	0.75	0.500	0.50	0.75	0.50	5.88
	1-3/8	0.75	0.500	0.50	0.75	0.50	6.13
	1-3/4	0.75	0.500	0.50	0.75	0.50	6.38
3-1/4	1	1.25	0.750	0.63	1.25	0.75	6.88
	1-3/8	1.25	0.750	0.63	1.25	0.75	7.13
	1-3/4	1.25	0.750	0.63	1.25	0.75	7.38
	2	1.25	0.750	0.63	1.25	0.75	7.50
	1	1.25	0.750	0.63	1.25	0.75	6.88
4	1-3/8	1.25	0.750	0.63	1.25	0.75	7.13
	1-3/4	1.25	0.750	0.63	1.25	0.75	7.38
	2	1.25	0.750	0.63	1.25	0.75	7.50
5	1	1.25	0.750	0.63	1.25	0.75	7.13
	1-3/8	1.25	0.750	0.63	1.25	0.75	7.38
	1-3/4	1.25	0.750	0.63	1.25	0.75	7.63
	2	1.25	0.750	0.63	1.25	0.75	7.75
6	1-3/8	1.50	1.000	0.75	1.50	1.00	8.13
	1-3/4	1.50	1.000	0.75	1.50	1.00	8.38
	2	1.50	1.000	0.75	1.50	1.00	8.50
	2-1/2	1.50	1.000	0.75	1.50	1.00	8.75



P1 Mounts continued

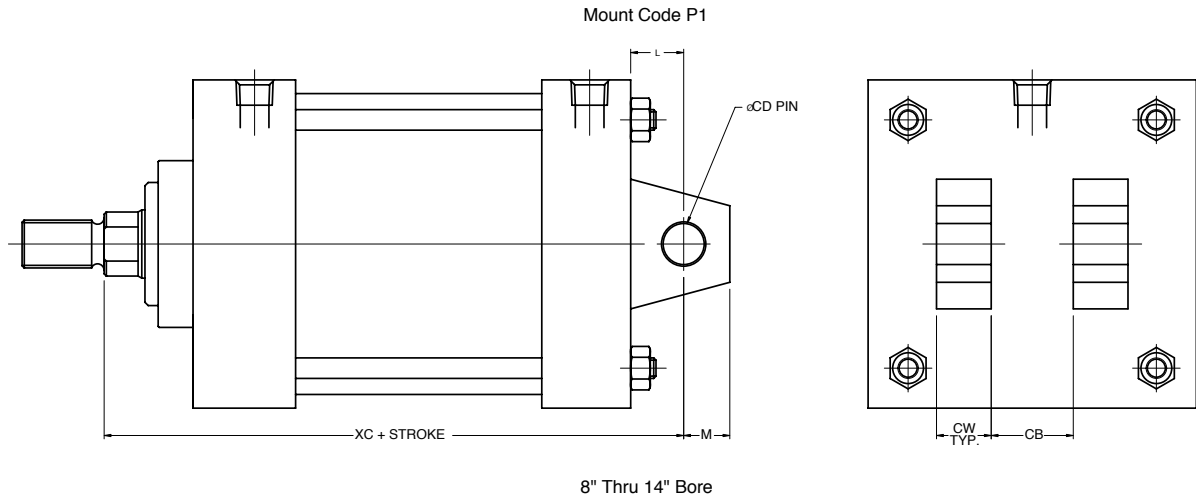

BORE	ROD	CB	CD	CW	L	M	XC
8	1-3/8	1.50	1.000	0.75	1.50	1.00	8.25
	1-3/4	1.50	1.000	0.75	1.50	1.00	8.50
	2	1.50	1.000	0.75	1.50	1.00	8.63
	2-1/2	1.50	1.000	0.75	1.50	1.00	8.88
10	1-3/4	2.00	1.375	1.00	2.13	1.38	10.38
	2	2.00	1.375	1.00	2.13	1.38	10.50
	2-1/2	2.00	1.375	1.00	2.13	1.38	10.75
	3	2.00	1.375	1.00	2.13	1.38	10.75
12	2	2.50	1.750	1.25	2.25	1.75	11.13
	2-1/2	2.50	1.750	1.25	2.25	1.75	11.38
	3	2.50	1.750	1.25	2.25	1.75	11.38
	3-1/2	2.50	1.750	1.25	2.25	1.75	11.38
14	2-1/2	2.50	2.000	1.25	2.50	2.00	12.88
	3	2.50	2.000	1.25	2.50	2.00	12.88
	3-1/2	2.50	2.000	1.25	2.50	2.00	12.88




ASP Series Steel Body NFPA

numatics®


P2 Mounts

Mount Code P2

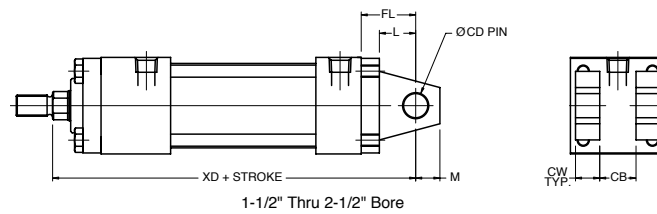

1-1/2" Thru 2-1/2" Bore

Mount Code P2


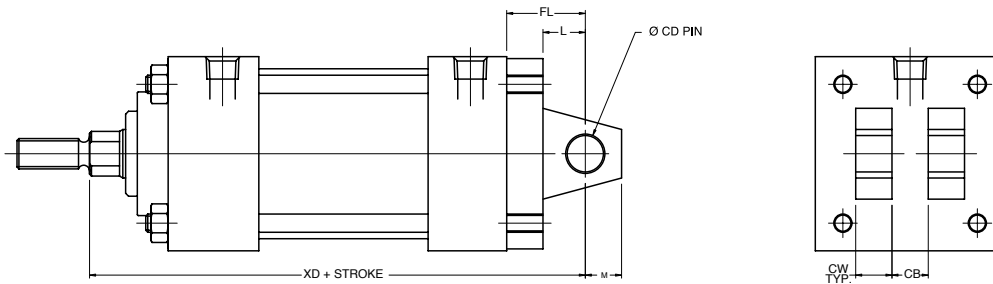


3-1/4" Thru 8" Bore

BORE	ROD	CB	CD	CW	FL	L	M	XD
1-1/2	5/8	0.75	0.500	0.50	1.13	0.75	0.50	5.75
	1	0.75	0.500	0.50	1.13	0.75	0.50	6.13
2	5/8	0.75	0.500	0.50	1.13	0.75	0.50	5.75
	1	0.75	0.500	0.50	1.13	0.75	0.50	6.13
	1-3/8	0.75	0.500	0.50	1.13	0.75	0.50	6.38
2-1/2	5/8	0.75	0.500	0.50	1.13	0.75	0.50	5.88
	1	0.75	0.500	0.50	1.13	0.75	0.50	6.25
	1-3/8	0.75	0.500	0.50	1.13	0.75	0.50	6.50
	1-3/4	0.75	0.500	0.50	1.13	0.75	0.50	6.75
3-1/4	1	1.25	0.750	0.63	1.88	1.25	0.75	7.50
	1-3/8	1.25	0.750	0.63	1.88	1.25	0.75	7.75
	1-3/4	1.25	0.750	0.63	1.88	1.25	0.75	8.00
	2	1.25	0.750	0.63	1.88	1.25	0.75	8.13
4	1	1.25	0.750	0.63	1.88	1.25	0.75	7.50
	1-3/8	1.25	0.750	0.63	1.88	1.25	0.75	7.75
	1-3/4	1.25	0.750	0.63	1.88	1.25	0.75	8.00
	2	1.25	0.750	0.63	1.88	1.25	0.75	8.13
5	1	1.25	0.750	0.63	1.88	1.25	0.75	7.75
	1-3/8	1.25	0.750	0.63	1.88	1.25	0.75	8.00
	1-3/4	1.25	0.750	0.63	1.88	1.25	0.75	8.50
	2	1.25	0.750	0.63	1.88	1.25	0.75	8.38
6	1-3/8	1.50	1.000	0.75	2.25	1.50	1.00	8.88
	1-3/4	1.50	1.000	0.75	2.25	1.50	1.00	9.13
	2	1.50	1.000	0.75	2.25	1.50	1.00	9.25
	2-1/2	1.50	1.000	0.75	2.25	1.50	1.00	9.50
8	1-3/8	1.50	1.000	0.75	2.25	1.50	1.00	9.00
	1-3/4	1.50	1.000	0.75	2.25	1.50	1.00	9.25
	2	1.50	1.000	0.75	2.25	1.50	1.00	9.38
	2-1/2	1.50	1.000	0.75	2.25	1.50	1.00	9.63



P3 Mounts

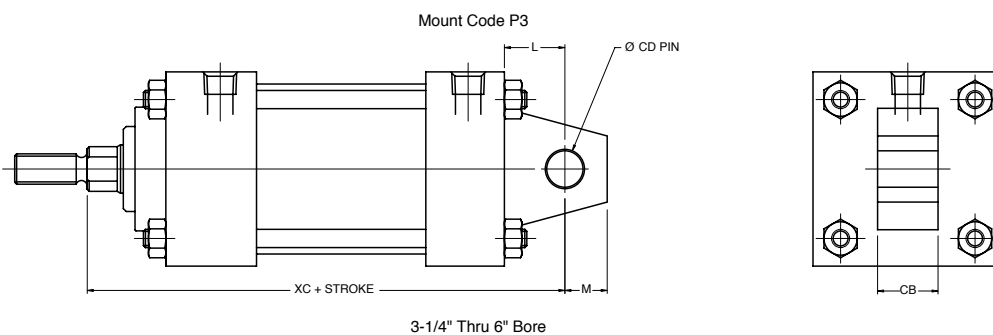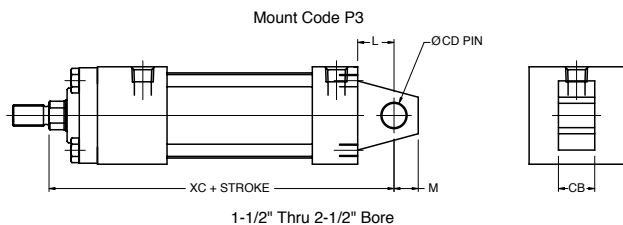


BORE	ROD	CB	CD	L	M	XC
1-1/2	5/8	0.75	0.50	0.75	0.50	5.38
	1	0.75	0.50	0.75	0.50	5.75
2	5/8	0.75	0.50	0.75	0.50	5.38
	1	0.75	0.50	0.75	0.50	5.75
	1-3/8	0.75	0.50	0.75	0.50	6.00
2-1/2	5/8	0.75	0.50	0.75	0.50	5.50
	1	0.75	0.50	0.75	0.50	5.88
	1-3/8	0.75	0.50	0.75	0.50	6.13
	1-3/4	0.75	0.50	0.75	0.50	6.38
3-1/4	1	1.25	0.75	1.25	0.75	6.88
	1-3/8	1.25	0.75	1.25	0.75	7.13
	1-3/4	1.25	0.75	1.25	0.75	7.38
	2	1.25	0.75	1.25	0.75	7.50
4	1	1.25	0.75	1.25	0.75	6.88
	1-3/8	1.25	0.75	1.25	0.75	7.13
	1-3/4	1.25	0.75	1.25	0.75	7.38
	2	1.25	0.75	1.25	0.75	7.50
5	1	1.25	0.75	1.25	0.75	7.13
	1-3/8	1.25	0.75	1.25	0.75	7.38
	1-3/4	1.25	0.75	1.25	0.75	7.63
	2	1.25	0.75	1.25	0.75	7.75
6	1-3/8	1.50	1.00	1.50	1.00	8.13
	1-3/4	1.50	1.00	1.50	1.00	8.38
	2	1.50	1.00	1.50	1.00	8.50
	2-1/2	1.50	1.00	1.50	1.00	8.75



ASP Series Steel Body NFPA

numatics®


P3 Mounts continued

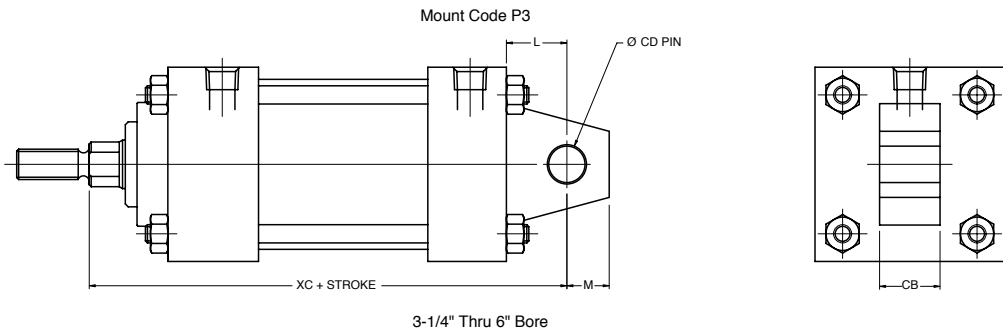

BORE	ROD	CB	CD	L	M	XC
8	1-3/8	1.50	1.00	1.50	1.00	8.25
	1-3/4	1.50	1.00	1.50	1.00	8.50
	2	1.50	1.00	1.50	1.00	8.63
	2-1/2	1.50	1.00	1.50	1.00	8.88
10	1-3/4	2.00	1.38	2.13	1.38	10.38
	2	2.00	1.38	2.13	1.38	10.50
	2-1/2	2.00	1.38	2.13	1.38	10.75
	3	2.00	1.38	2.13	1.38	10.75
12	2	2.50	1.75	2.25	1.75	11.13
	2-1/2	2.50	1.75	2.25	1.75	11.38
	3	2.50	1.75	2.25	1.75	11.38
	3-1/2	2.50	1.75	2.25	1.75	11.38
14	2-1/2	2.50	2.00	2.50	2.00	12.88
	3	2.50	2.00	2.50	2.00	12.88
	3-1/2	2.50	2.00	2.50	2.00	12.88



P4 Mounts

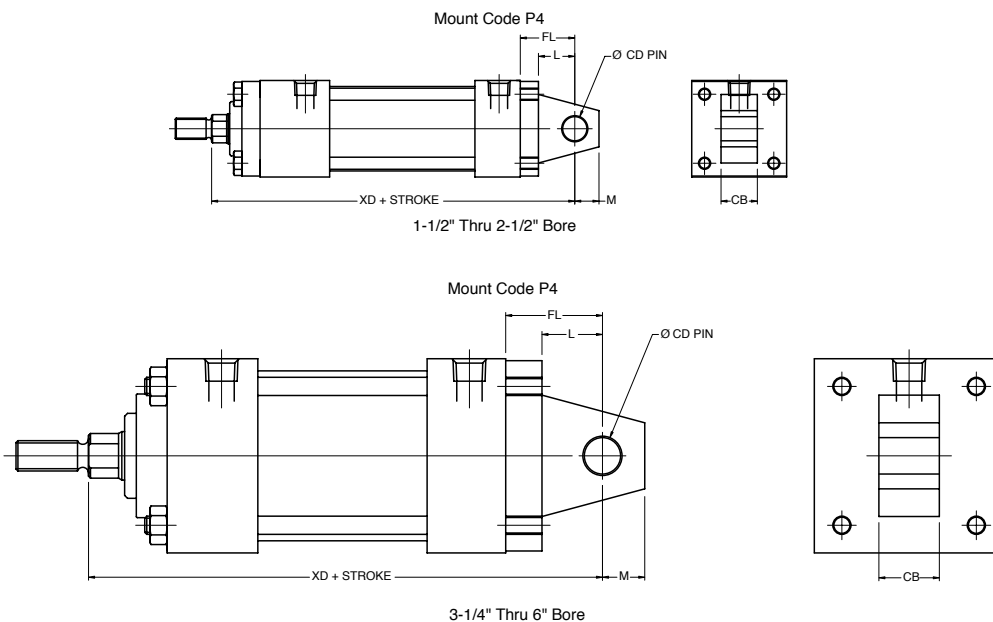





BORE	ROD	CB	CD	FL	L	M	XD
1-1/2	5/8	0.75	0.50	1.13	0.75	0.50	5.75
	1	0.75	0.50	1.13	0.75	0.50	6.13
2	5/8	0.75	0.50	1.13	0.75	0.50	5.75
	1	0.75	0.50	1.13	0.75	0.50	6.13
	1-3/8	0.75	0.50	1.13	0.75	0.50	6.38
2-1/2	5/8	0.75	0.50	1.13	0.75	0.50	5.88
	1	0.75	0.50	1.13	0.75	0.50	6.25
	1-3/8	0.75	0.50	1.13	0.75	0.50	6.50
	1-3/4	0.75	0.50	1.13	0.75	0.50	6.75
3-1/4	1	1.25	0.75	1.88	1.25	0.75	7.50
	1-3/8	1.25	0.75	1.88	1.25	0.75	7.75
	1-3/4	1.25	0.75	1.88	1.25	0.75	8.00
	2	1.25	0.75	1.88	1.25	0.75	8.13
	1	1.25	0.75	1.88	1.25	0.75	7.50
4	1-3/8	1.25	0.75	1.88	1.25	0.75	7.75
	1-3/4	1.25	0.75	1.88	1.25	0.75	8.00
	2	1.25	0.75	1.88	1.25	0.75	8.13
5	1	1.25	0.75	1.88	1.25	0.75	7.75
	1-3/8	1.25	0.75	1.88	1.25	0.75	8.00
	1-3/4	1.25	0.75	1.88	1.25	0.75	8.50
	2	1.25	0.75	1.88	1.25	0.75	8.38
6	1-3/8	1.50	1.00	2.25	1.50	1.00	8.88
	1-3/4	1.50	1.00	2.25	1.50	1.00	9.13
	2	1.50	1.00	2.25	1.50	1.00	9.25
	2-1/2	1.50	1.00	2.25	1.50	1.00	9.50
8	1-3/8	1.50	1.00	2.25	1.50	1.00	9.00
	1-3/4	1.50	1.00	2.25	1.50	1.00	9.25
	2	1.50	1.00	2.25	1.50	1.00	9.38
	2-1/2	1.50	1.00	2.25	1.50	1.00	9.63



ASP Series Steel Body NFPA

numatics®


S1 Mounts

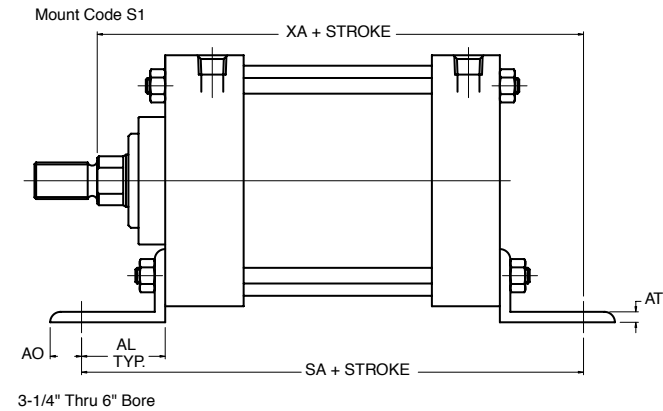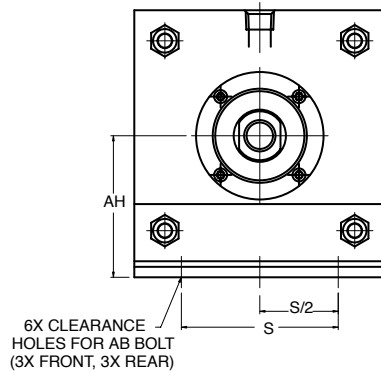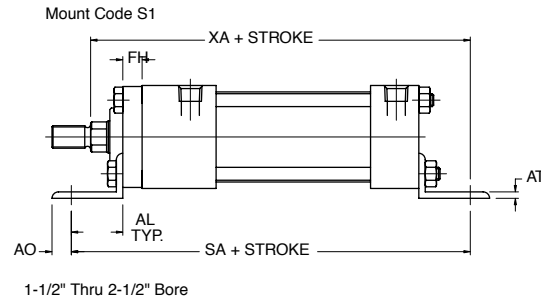

BORE	ROD	AB	AH	AL	AO	AT	FH	S	SA	XA
1-1/2	5/8	0.38	1.19	1.00	0.38	0.13	0.38	1.25	6.00	5.63
	1	0.38	1.19	1.00	0.38	0.13	0.38	1.25	6.00	6.00
2	5/8	0.38	1.44	1.00	0.38	0.13	0.38	1.75	6.00	5.63
	1	0.38	1.44	1.00	0.38	0.13	0.38	1.75	6.00	6.00
	1-3/8	0.38	1.44	1.00	0.38	0.13	0.38	1.75	6.00	6.25
2-1/2	5/8	0.38	1.63	1.00	0.38	0.13	0.38	2.25	6.13	5.75
	1	0.38	1.63	1.00	0.38	0.13	0.38	2.25	6.13	6.13
	1-3/8	0.38	1.63	1.00	0.38	0.13	0.38	2.25	6.13	6.38
	1-3/4	0.38	1.63	1.00	0.38	0.13	0.38	2.25	6.13	6.63
3-1/4	1	0.50	1.94	1.25	0.50	0.13	0.63	2.75	7.38	6.88
	1-3/8	0.50	1.94	1.25	0.50	0.13	0.63	2.75	7.38	7.13
	1-3/4	0.50	1.94	1.25	0.50	0.13	0.63	2.75	7.38	7.38
	2	0.50	1.94	1.25	0.50	0.13	0.63	2.75	7.38	7.50
	1	0.50	2.25	1.25	0.50	0.13	0.63	3.50	7.38	6.88
4	1-3/8	0.50	2.25	1.25	0.50	0.13	0.63	3.50	7.38	7.13
	1-3/4	0.50	2.25	1.25	0.50	0.13	0.63	3.50	7.38	7.38
	2	0.50	2.25	1.25	0.50	0.13	0.63	3.50	7.38	7.50
5	1	0.63	2.75	1.38	0.63	0.19	0.63	4.25	7.88	7.25
	1-3/8	0.63	2.75	1.38	0.63	0.19	0.63	4.25	7.88	7.50
	1-3/4	0.63	2.75	1.38	0.63	0.19	0.63	4.25	7.88	7.75
	2	0.63	2.75	1.38	0.63	0.19	0.63	4.25	7.88	7.88
6	1-3/8	0.75	3.25	1.38	0.63	0.19	0.75	5.25	8.50	8.00
	1-3/4	0.75	3.25	1.38	0.63	0.19	0.75	5.25	8.50	8.25
	2	0.75	3.25	1.38	0.63	0.19	0.75	5.25	8.50	8.38
	2-1/2	0.75	3.25	1.38	0.63	0.19	0.75	5.25	8.50	8.63



S1 Mounts continued

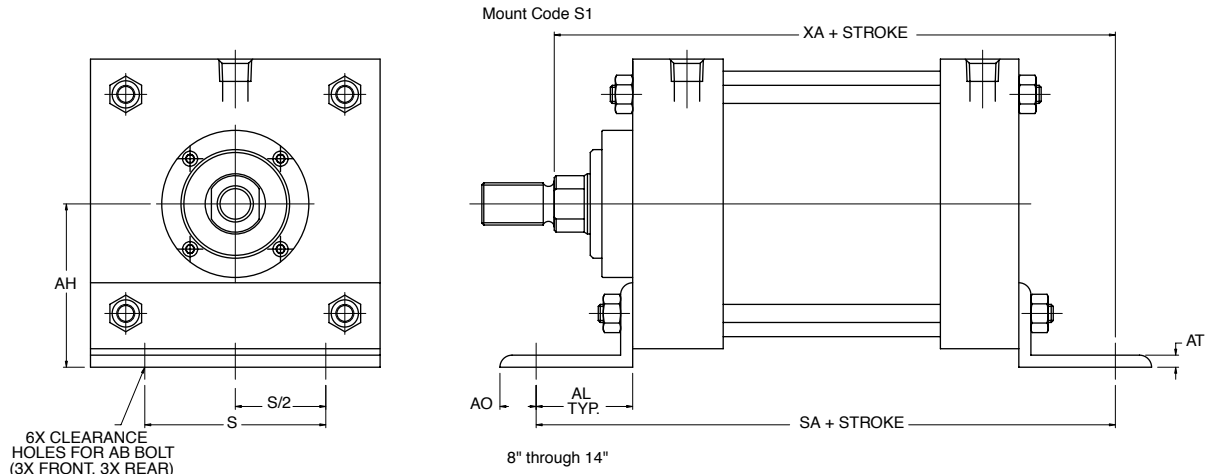

BORE	ROD	AB	AH	AL	AO	AT	S	SA	XA
8	1-3/8	0.75	4.25	1.81	0.69	0.25	7.13	8.75	8.56
	1-3/4	0.75	4.25	1.81	0.69	0.25	7.13	8.75	8.81
	2	0.75	4.25	1.81	0.69	0.25	7.13	8.75	8.94
	2-1/2	0.75	4.25	1.81	0.69	0.25	7.13	8.75	9.91
10	1-3/4	1.00	5.31	2.13	0.88	0.25	8.88	10.63	10.38
	2	1.00	5.31	2.13	0.88	0.25	8.88	10.63	10.50
	2-1/2	1.00	5.31	2.13	0.88	0.25	8.88	10.63	10.75
	3	1.00	5.31	2.13	0.88	0.25	8.88	10.63	10.75
12	2	1.00	6.38	2.13	0.88	0.38	11.00	11.13	11.00
	2-1/2	1.00	6.38	2.13	0.88	0.38	11.00	11.13	11.25
	3	1.00	6.38	2.13	0.88	0.38	11.00	11.13	11.25
	3-1/2	1.00	6.38	2.13	0.88	0.38	11.00	11.13	11.25
14	2-1/2	1.25	7.38	2.44	1.06	0.38	12.63	13.00	12.81
	3	1.25	7.38	2.44	1.06	0.38	12.63	13.00	12.81
	3-1/2	1.25	7.38	2.44	1.06	0.38	12.63	13.00	12.81




ASP Series Steel Body NFPA


numatics®

S2 Mounts

Mount Code S2

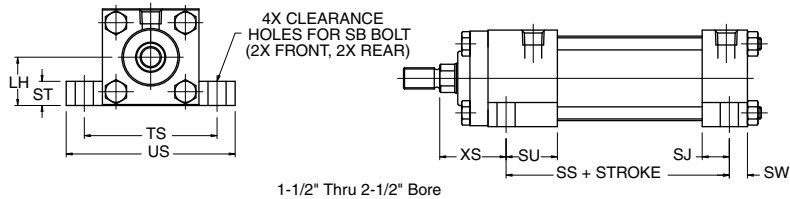


Mount Code S2

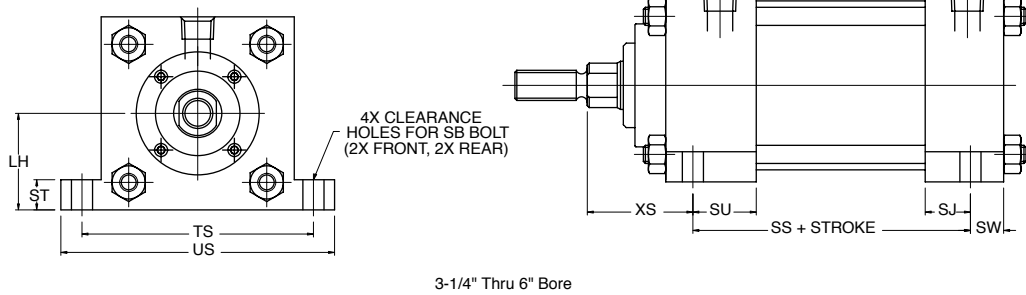

BORE	ROD	LH	SB	SJ	SS	ST	SU	SW	TS	US	XS
1-1/2	5/8	1.00	0.38	0.63	2.88	0.50	1.13	0.38	2.75	3.50	1.38
	1	1.00	0.38	0.63	2.88	0.50	1.13	0.38	2.75	3.50	1.75
2	5/8	1.25	0.38	0.63	2.88	0.50	1.13	0.38	3.25	4.00	1.38
	1	1.25	0.38	0.63	2.88	0.50	1.13	0.38	3.25	4.00	1.75
	1-3/8	1.25	0.38	0.63	2.88	0.50	1.13	0.38	3.25	4.00	2.00
2-1/2	5/8	1.50	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	1.38
	1	1.50	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	1.75
	1-3/8	1.50	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	2.00
	1-3/4	1.50	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	2.25
3-1/4	1	1.88	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	1.88
	1-3/8	1.88	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	2.13
	1-3/4	1.88	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	2.38
	2	1.88	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	2.50
	1	2.25	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	1.88
4	1-3/8	2.25	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	2.13
	1-3/4	2.25	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	2.38
	2	2.25	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	2.50
5	1	2.75	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.06
	1-3/8	2.75	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.31
	1-3/4	2.75	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.56
	2	2.75	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.69
6	1-3/8	3.25	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.31
	1-3/4	3.25	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.56
	2	3.25	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.69
	2-1/2	3.25	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.94



S2 Mounts continued

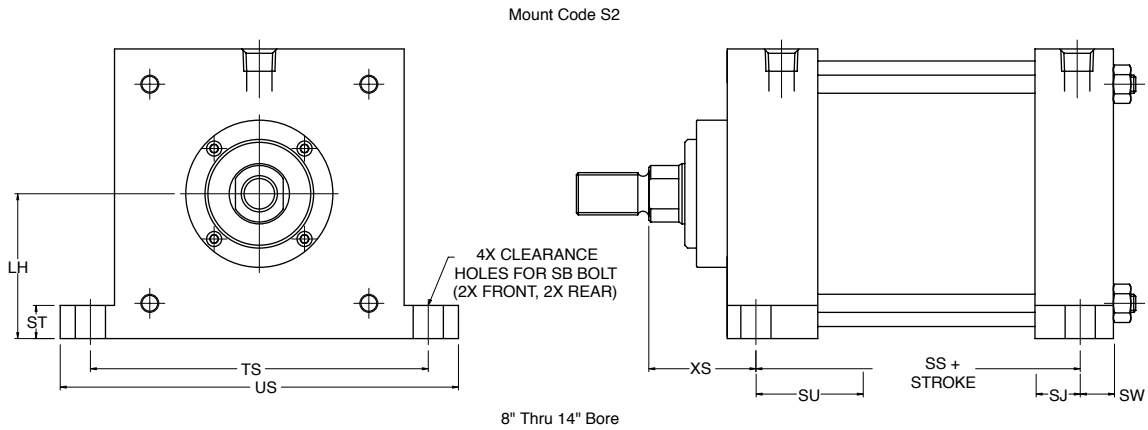

BORE	ROD	LH	SB	SJ	SS	ST	SU	SW	TS	US	XS
8	1-3/8	4.25	0.75	0.81	3.75	1.00	1.31	0.69	9.88	11.25	2.31
	1-3/4	4.25	0.75	0.81	3.75	1.00	1.31	0.69	9.88	11.25	2.56
	2	4.25	0.75	0.81	3.75	1.00	1.31	0.69	9.88	11.25	2.69
	2-1/2	4.25	0.75	0.81	3.75	1.00	1.31	0.69	9.88	11.25	2.94
10	1-3/4	5.31	1.00	1.13	4.63	1.25	1.38	0.88	12.38	14.13	2.75
	2	5.31	1.00	1.13	4.63	1.25	1.38	0.88	12.38	14.13	2.88
	2-1/2	5.31	1.00	1.13	4.63	1.25	1.38	0.88	12.38	14.13	3.13
	3	5.31	1.00	1.13	4.63	1.25	1.38	0.88	12.38	14.13	3.13
12	2	6.38	1.00	1.13	5.13	1.25	1.38	0.88	14.50	16.25	2.88
	2-1/2	6.38	1.00	1.13	5.13	1.25	1.38	0.88	14.50	16.25	3.13
	3	6.38	1.00	1.13	5.13	1.25	1.38	0.88	14.50	16.25	3.13
	3-1/2	6.38	1.00	1.13	5.13	1.25	1.38	0.88	14.50	16.25	3.13
14	2-1/2	7.38	1.25	1.13	5.88	1.50	1.63	1.13	17.00	19.25	3.38
	3	7.38	1.25	1.13	5.88	1.50	1.63	1.13	17.00	19.25	3.38
	3-1/2	7.38	1.25	1.13	5.88	1.50	1.63	1.13	17.00	19.25	3.38




ASP Series Steel Body NFPA

numatics®


S3 Mounts

Mount Code S3

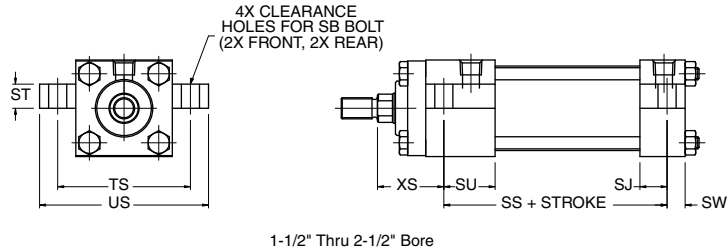

1-1/2" Thru 2-1/2" Bore

Mount Code S3

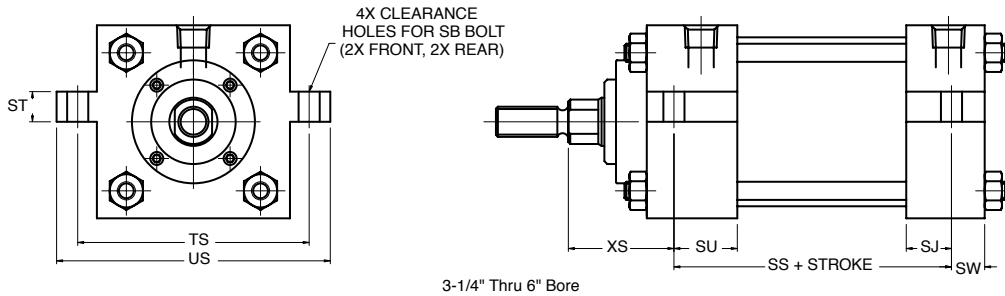


3-1/4" Thru 6" Bore

BORE	ROD	SB	SJ	SS	ST	SU	SW	TS	US	XS
1-1/2	5/8	0.38	0.63	2.88	0.50	1.13	0.38	2.75	3.50	1.38
	1	0.38	0.63	2.88	0.50	1.13	0.38	2.75	3.50	1.75
2	5/8	0.38	0.63	2.88	0.50	1.13	0.38	3.25	4.00	1.38
	1	0.38	0.63	2.88	0.50	1.13	0.38	3.25	4.00	1.75
	1-3/8	0.38	0.63	2.88	0.50	1.13	0.38	3.25	4.00	2.00
2-1/2	5/8	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	1.38
	1	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	1.75
	1-3/8	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	2.00
	1-3/4	0.38	0.63	3.00	0.50	1.13	0.38	3.75	4.50	2.25
3-1/4	1	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	1.88
	1-3/8	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	2.13
	1-3/4	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	2.38
	2	0.50	0.75	3.25	0.75	1.25	0.50	4.75	5.75	2.50
	1	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	1.88
4	1-3/8	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	2.13
	1-3/4	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	2.38
	2	0.50	0.75	3.25	0.75	1.25	0.50	5.50	6.50	2.50
5	1	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.06
	1-3/8	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.31
	1-3/4	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.56
	2	0.75	0.56	3.13	1.00	1.06	0.69	6.88	8.25	2.69
6	1-3/8	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.31
	1-3/4	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.56
	2	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.69
	2-1/2	0.75	0.81	3.63	1.00	1.31	0.69	7.88	9.25	2.94




S4 Mounts

Mount Code S4

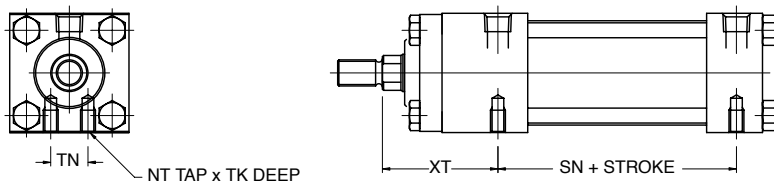

1-1/2" Thru 2-1/2" Bore

MOUNT CODE S4

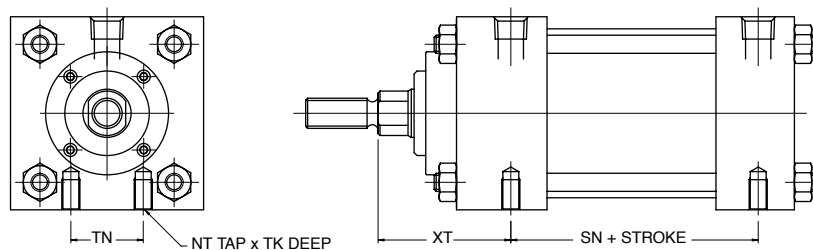

3-1/4" THRU 8" BORE


BORE	ROD	NT	TK	TN	SN	XT
1-1/2	5/8	1/4-20	0.375	0.625	2.250	1.938
	1	1/4-20	0.313	0.625	2.250	2.313
2	5/8	5/16-18	0.500	0.875	2.250	1.938
	1	5/16-18	0.500	0.875	2.250	2.313
	1-3/8	5/16-18	0.375	0.875	2.250	2.563
2-1/2	5/8	3/8-16	0.625	1.250	2.375	1.938
	1	3/8-16	0.625	1.250	2.375	2.313
	1-3/8	3/8-16	0.375	1.250	2.375	2.563
	1-3/4	3/8-16	0.375	1.250	2.375	2.563
	2	3/8-16	0.375	1.250	2.375	2.563
3-1/4	1	1/2-13	0.750	1.500	2.625	2.438
	1-3/8	1/2-13	0.750	1.500	2.625	2.688
	1-3/4	1/2-13	0.750	1.500	2.625	2.938
	2	1/2-13	0.500	1.500	2.625	3.063
	1	1/2-13	0.750	2.063	2.625	2.438
4	1-3/8	1/2-13	0.750	2.063	2.625	2.688
	1-3/4	1/2-13	0.750	2.063	2.625	2.938
	2	1/2-13	0.750	2.063	2.625	3.063
5	1	5/8-11	1.000	2.688	2.875	2.438
	1-3/8	5/8-11	1.000	2.688	2.875	2.688
	1-3/4	5/8-11	1.000	2.688	2.875	2.938
	2	5/8-11	1.000	2.688	2.875	3.063
6	1-3/8	3/4-10	1.125	3.250	3.125	2.813
	1-3/4	3/4-10	1.125	3.250	3.125	3.063
	2	3/4-10	1.125	3.250	3.125	3.188
	2-1/2	3/4-10	1.125	3.250	3.125	3.438



ASP Series Steel Body NFPA

numatics®



S4 Mounts (continued)

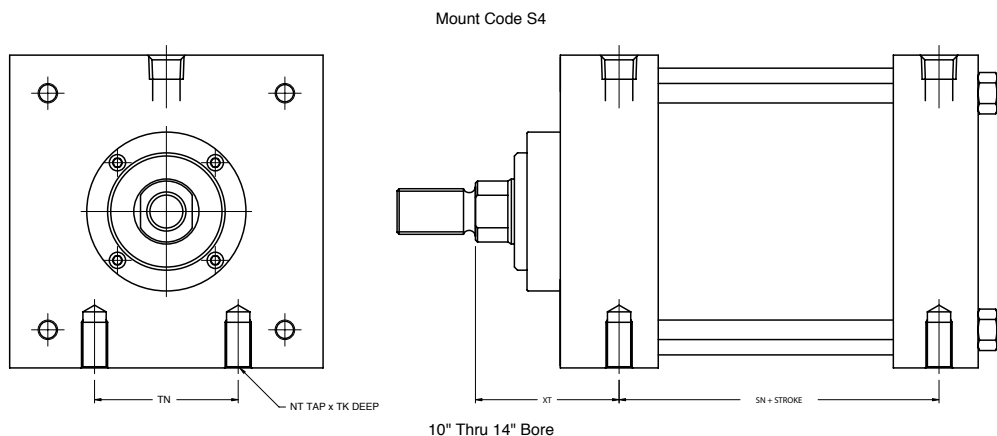

BORE	ROD	NT	TK	TN	SN	XT
8	1-3/8	3/4-10	1.125	4.500	3.250	2.813
	1-3/4	3/4-10	1.125	4.500	3.250	3.063
	2	3/4-10	1.125	4.500	3.250	3.188
	2-1/2	3/4-10	1.125	4.500	3.250	3.438
10	1-3/4	1-8	2.000	5.500	4.125	3.125
	2	1-8	2.000	5.500	4.125	3.250
	2-1/2	1-8	2.000	5.500	4.125	3.500
	3	1-8	2.000	5.500	4.125	3.500
12	2	1-8	2.000	7.250	4.625	3.250
	2-1/2	1-8	2.000	7.250	4.625	3.500
	3	1-8	2.000	7.250	4.625	3.500
	3-1/2	1-8	2.000	7.250	4.625	3.500
14	2-1/2	1 1/4-7	2.500	8.375	5.500	3.813
	3	1 1/4-7	2.500	8.375	5.500	3.813
	3-1/2	1 1/4-7	2.500	8.375	5.500	3.813



S7 Mounts

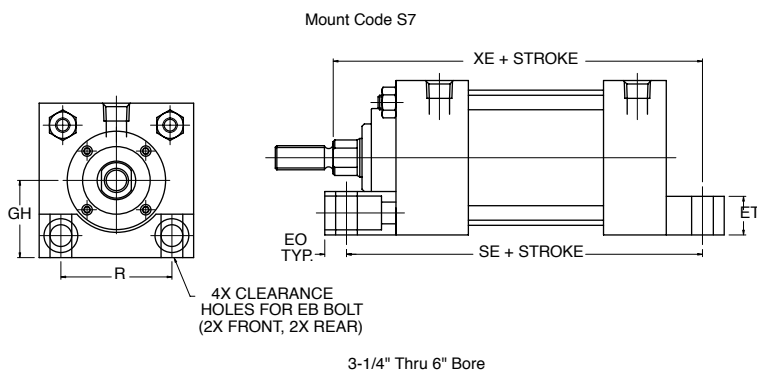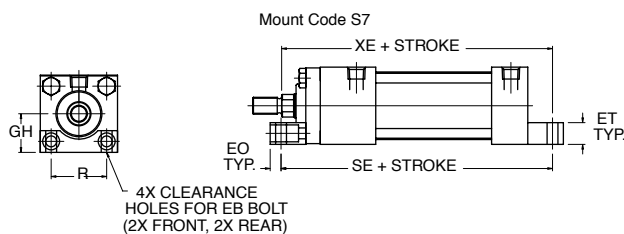




BORE	ROD	EB	GH	SE	ET	EO	R	XE
1-1/2	5/8	0.25	1.00	5.500	0.55	0.25	1.43	5.38
	1	0.25	1.00	5.500	0.55	0.25	1.43	5.75
2	5/8	0.31	1.25	5.875	0.64	0.31	1.84	5.56
	1	0.31	1.25	5.875	0.64	0.31	1.84	5.94
2-1/2	5/8	0.31	1.50	6.625	0.80	0.31	2.19	5.81
	1	0.31	1.50	6.625	0.80	0.31	2.19	6.19
	1-3/8	0.31	1.50	6.625	0.80	0.31	2.19	6.44
3-1/4	1	0.38	1.88	6.625	0.95	0.50	2.76	6.50
	1-3/8	0.38	1.88	6.625	0.95	0.50	2.76	6.75
	1-3/4	0.38	1.88	6.625	0.95	0.50	2.76	7.00
	2	0.38	1.88	6.625	0.95	0.50	2.76	7.13
	1	0.38	2.25	6.875	1.17	0.50	3.32	6.63
4	1-3/8	0.38	2.25	6.875	1.17	0.50	3.32	6.88
	1-3/4	0.38	2.25	6.875	1.17	0.50	3.32	7.13
	2	0.38	2.25	6.875	1.17	0.50	3.32	7.25
5	1	0.50	2.75	7.250	1.39	0.50	4.10	6.94
	1-3/8	0.50	2.75	7.250	1.39	0.50	4.10	7.19
	1-3/4	0.50	2.75	7.250	1.39	0.50	4.10	7.44
	2	0.50	2.75	7.250	1.39	0.50	4.10	7.56
6	1-3/8	0.50	3.25	7.750	1.61	0.50	4.88	7.63
	1-3/4	0.50	3.25	7.750	1.61	0.50	4.88	7.88
	2	0.50	3.25	7.750	1.61	0.50	4.88	8.00
	2-1/2	0.50	3.25	7.750	1.61	0.50	4.88	8.25






ASP Series Steel Body NFPA

numatics®



T1 Mounts

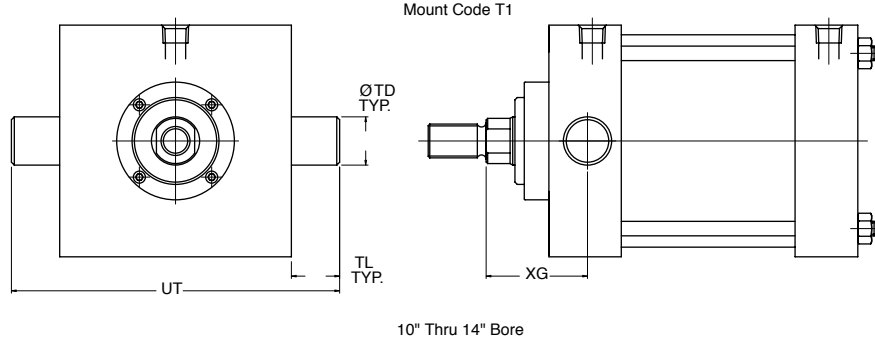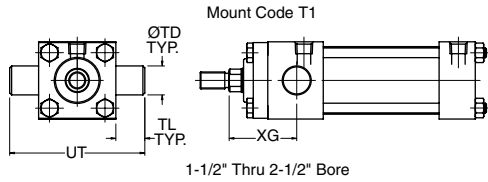

T2 Mounts

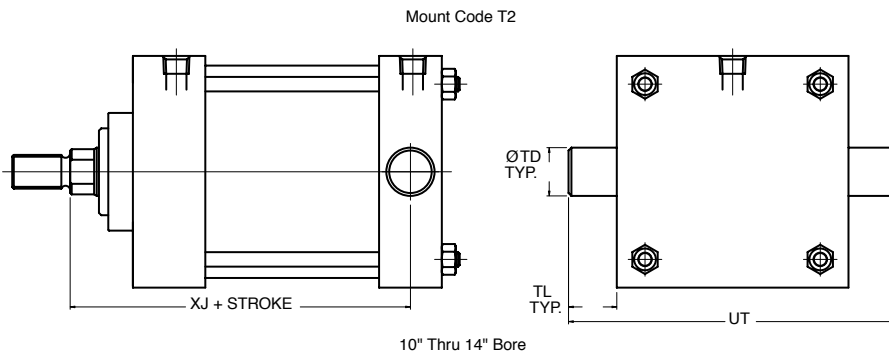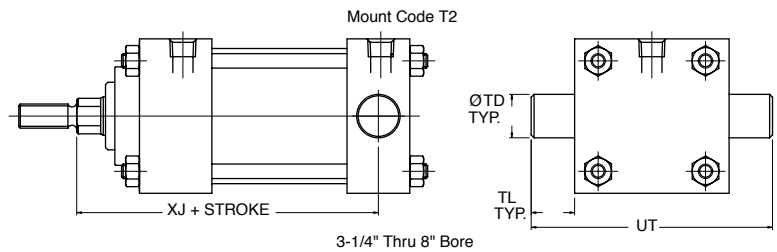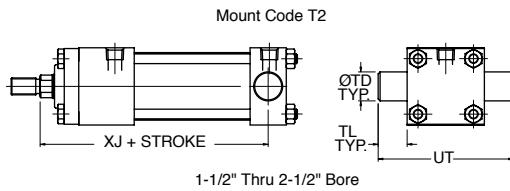

T4 Mounts

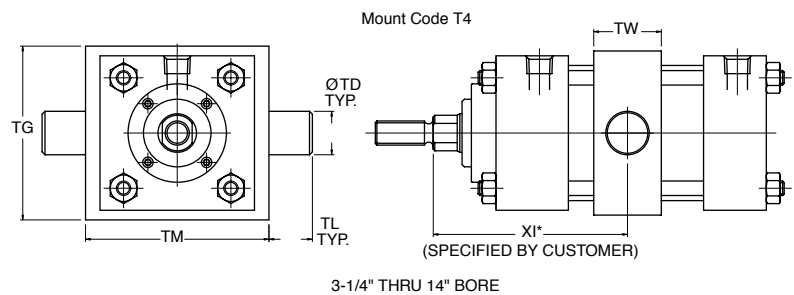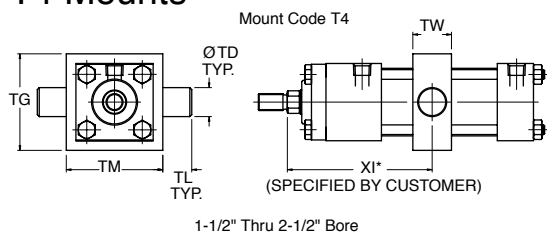



T Mounts continued




BORE	ROD	TD	TG	TL	TM	TW	UT	XG	XI (MIN)	XJ
1-1/2	5/8	1.000	2.50	1.00	2.50	1.25	4.00	1.75	3.13	4.13
	1	1.000	2.50	1.00	2.50	1.25	4.00	2.13	3.50	4.50
2	5/8	1.000	3.00	1.00	3.00	1.50	4.50	1.75	3.25	4.13
	1	1.000	3.00	1.00	3.00	1.50	4.50	2.13	3.63	4.50
	1-3/8	1.000	3.00	1.00	3.00	1.50	4.50	2.38	3.88	4.75
2-1/2	5/8	1.000	3.50	1.00	3.50	1.50	5.00	1.75	3.25	4.25
	1	1.000	3.50	1.00	3.50	1.50	5.00	2.13	3.63	4.63
	1-3/8	1.000	3.50	1.00	3.50	1.50	5.00	2.38	3.88	4.88
	1-3/4	1.000	3.50	1.00	3.50	1.50	5.00	2.63	4.13	5.13
3-1/4	1	1.000	4.25	1.00	4.50	2.00	5.75	2.25	4.13	5.00
	1-3/8	1.000	4.25	1.00	4.50	2.00	5.75	2.50	4.38	5.25
	1-3/4	1.000	4.25	1.00	4.50	2.00	5.75	2.75	4.63	5.50
	2	1.000	4.25	1.00	4.50	2.00	5.75	2.88	4.75	5.63
4	1	1.000	5.00	1.00	5.25	2.00	6.50	2.25	4.13	5.00
	1-3/8	1.000	5.00	1.00	5.25	2.00	6.50	2.50	4.38	5.25
	1-3/4	1.000	5.00	1.00	5.25	2.00	6.50	2.75	4.63	5.50
	2	1.000	5.00	1.00	5.25	2.00	6.50	2.88	4.75	5.63
5	1	1.000	6.00	1.00	6.25	2.00	7.50	2.25	4.13	5.25
	1-3/8	1.000	6.00	1.00	6.25	2.00	7.50	2.50	4.38	5.50
	1-3/4	1.000	6.00	1.00	6.25	2.00	7.50	2.75	4.63	5.75
	2	1.000	6.00	1.00	6.25	2.00	7.50	2.88	4.75	5.88
6	1-3/8	1.375	7.00	1.38	7.63	2.50	9.25	2.63	4.88	5.88
	1-3/4	1.375	7.00	1.38	7.63	2.50	9.25	2.88	5.13	6.13
	2	1.375	7.00	1.38	7.63	2.50	9.25	3.00	5.25	6.25
	2-1/2	1.375	7.00	1.38	7.63	2.50	9.25	3.25	5.50	6.50
8	1-3/8	1.375	9.50	1.38	9.75	2.50	11.25	2.63	4.88	6.00
	1-3/4	1.375	9.50	1.38	9.75	2.50	11.25	2.88	5.13	6.25
	2	1.375	9.50	1.38	9.75	2.50	11.25	3.00	5.25	6.38
	2-1/2	1.375	9.50	1.38	9.75	2.50	11.25	3.25	5.50	6.63
10	1-3/4	1.750	11.75	1.75	12.00	3.00	14.13	3.00	5.63	7.25
	2	1.750	11.75	1.75	12.00	3.00	14.13	3.13	5.75	7.38
	2-1/2	1.750	11.75	1.75	12.00	3.00	14.13	3.38	6.00	7.63
	3	1.750	11.75	1.75	12.00	3.00	14.13	3.38	6.00	7.63
12	2	1.750	13.75	1.75	14.00	3.00	16.25	3.13	5.75	7.88
	2-1/2	1.750	13.75	1.75	14.00	3.00	16.25	3.38	6.00	8.13
	3	1.750	13.75	1.75	14.00	3.00	16.25	3.38	6.00	8.13
	3-1/2	1.750	13.75	1.75	14.00	3.00	16.25	3.38	6.00	8.13
14	2-1/2	2.000	16.00	2.00	16.25	3.50	18.75	3.63	6.75	9.25
	3	2.000	16.00	2.00	16.25	3.50	18.75	3.63	6.75	9.25
	3-1/2	2.000	16.00	2.00	16.25	3.50	18.75	3.63	6.75	9.25







ASP Series Steel Body NFPA

numatics®




X1 Mounts

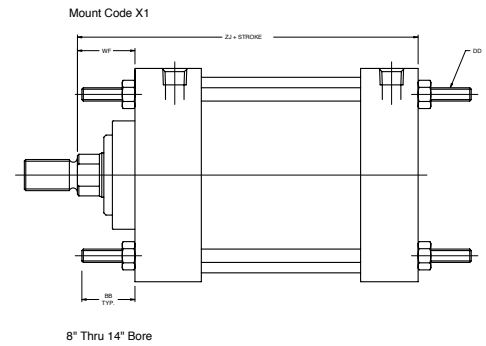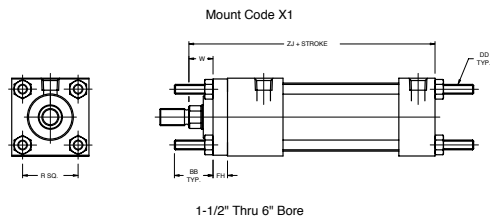

X2 Mounts

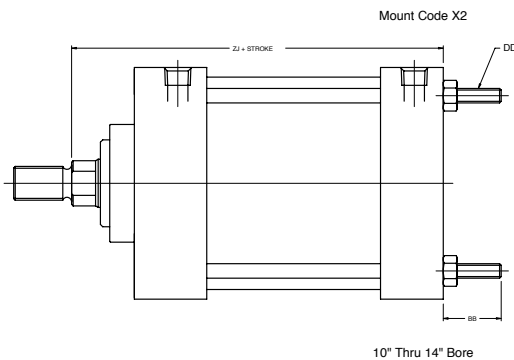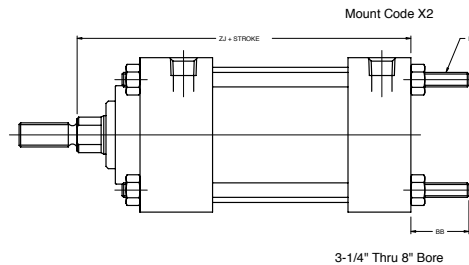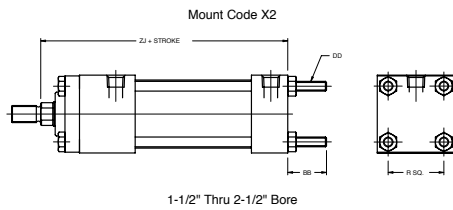

X3 Mounts

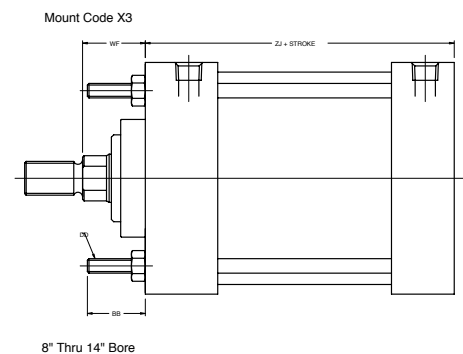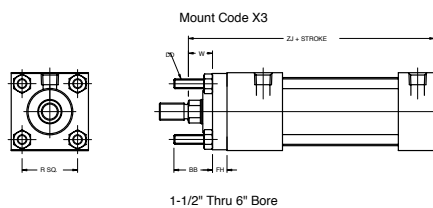



X Mounts (continued)


BORE	ROD	BB	DD	FH	R	W	ZJ
1-1/2	5/8	1.000	1/4-28	0.38	1.43	0.63	4.625
	1	1.000	1/4-28	0.38	1.43	1.00	5.000
2	5/8	1.125	5/16-24	0.38	1.84	0.63	4.625
	1	1.125	5/16-24	0.38	1.84	1.00	5.000
	1-3/8	1.125	5/16-24	0.38	1.84	1.25	5.250
2-1/2	5/8	1.125	5/16-24	0.38	2.19	0.63	4.750
	1	1.125	5/16-24	0.38	2.19	1.00	5.125
	1-3/8	1.125	5/16-24	0.38	2.19	1.25	5.375
	1-3/4	1.125	5/16-24	0.38	2.19	1.50	5.625
3-1/4	1	1.375	3/8-24	0.63	2.76	0.75	5.625
	1-3/8	1.375	3/8-24	0.63	2.76	1.00	5.875
	1-3/4	1.375	3/8-24	0.63	2.76	1.25	6.125
	2	1.375	3/8-24	0.63	2.76	1.38	6.250
4	1	1.375	3/8-24	0.63	3.32	0.75	5.625
	1-3/8	1.375	3/8-24	0.63	3.32	1.00	5.875
	1-3/4	1.375	3/8-24	0.63	3.32	1.25	6.125
	2	1.375	3/8-24	0.63	3.32	1.38	6.250
5	1	1.813	1/2-20	0.63	4.10	0.75	5.875
	1-3/8	1.813	1/2-20	0.63	4.10	1.00	6.125
	1-3/4	1.813	1/2-20	0.63	4.10	1.25	6.375
	2	1.813	1/2-20	0.63	4.10	1.38	6.500
6	1-3/8	1.813	1/2-20	0.75	4.88	0.88	6.625
	1-3/4	1.813	1/2-20	0.75	4.88	1.13	6.875
	2	1.813	1/2-20	0.75	4.88	1.25	7.000
	2-1/2	1.813	1/2-20	0.75	4.88	1.50	7.250
8	1-3/8	2.313	5/8-18	N/A	6.44	1.63	6.750
	1-3/4	2.313	5/8-18	N/A	6.44	1.88	7.000
	2	2.313	5/8-18	N/A	6.44	2.00	7.125
	2-1/2	2.313	5/8-18	N/A	6.44	2.25	7.375
10	1-3/4	2.690	3/4-16	N/A	8.06	1.88	8.250
	2	2.690	3/4-16	N/A	8.06	2.00	8.375
	2-1/2	2.690	3/4-16	N/A	8.06	2.25	8.625
	3	2.690	3/4-16	N/A	8.06	2.25	8.625
12	2	2.690	3/4-16	N/A	9.41	2.00	8.875
	2-1/2	2.690	3/4-16	N/A	9.41	2.25	9.125
	3	2.690	3/4-16	N/A	9.41	2.25	9.125
	3-1/2	2.690	3/4-16	N/A	9.41	2.25	9.125
14	2-1/2	3.190	7/8-14	N/A	10.90	2.25	10.375
	3	3.190	7/8-14	N/A	10.90	2.25	10.375
	3-1/2	3.190	7/8-14	N/A	10.90	2.25	10.375



ASP Series Steel Body NFPA

numatics®

U3 Mount

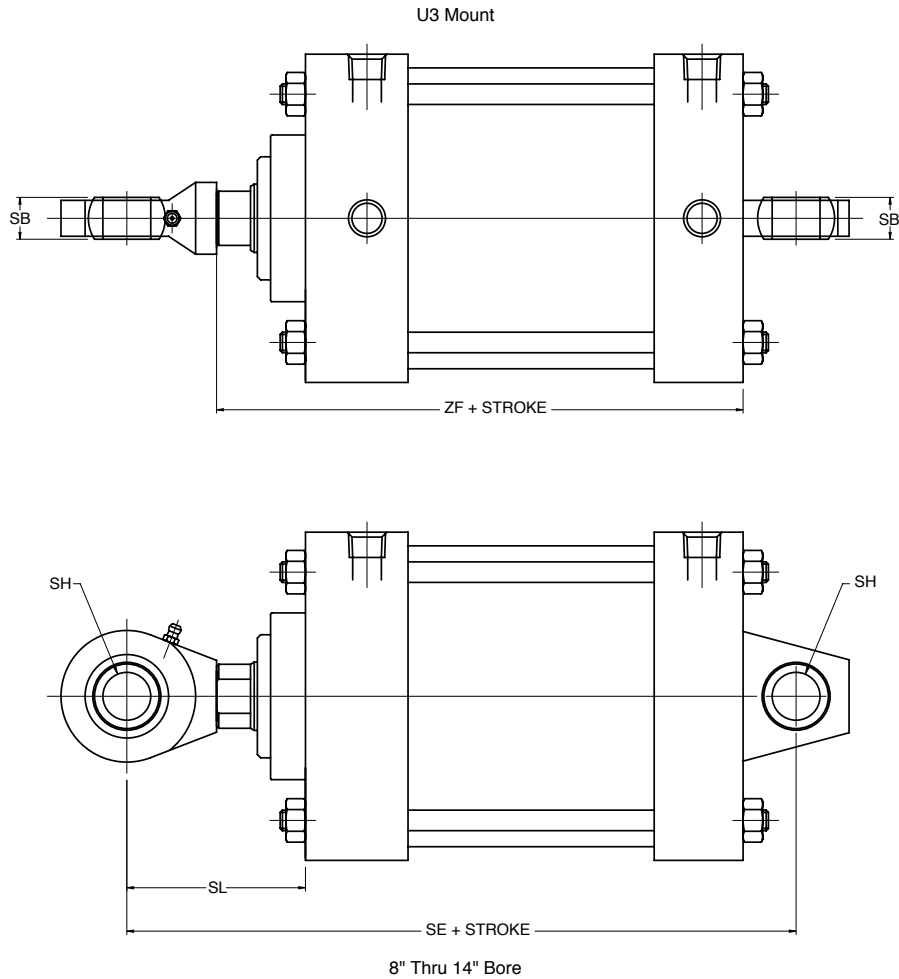


BORE	ROD	SB	SH	SL	SE
8	1-3/8	0.88	1.00	3.50	10.13
	1-3/4	0.88	1.00	3.75	10.38
	2	0.88	1.00	3.88	10.50
	2-1/2	0.88	1.00	4.13	10.75
10	1-3/4	1.19	1.38	4.00	12.50
	2	1.19	1.38	4.13	12.63
	2-1/2	1.19	1.38	4.38	12.88
	3	1.19	1.38	4.38	12.88
12	2	1.53	1.75	4.50	13.63
	2-1/2	1.53	1.75	4.75	13.88
	3	1.53	1.75	4.38	13.88
	3-1/2	1.53	1.75	4.38	13.88
14	2-1/2	1.75	2.00	5.00	15.63
	3	1.75	2.00	4.38	15.63
	3-1/2	1.75	2.00	4.38	15.63




Double Rod Mounts

DA-DOUBLE ROD END

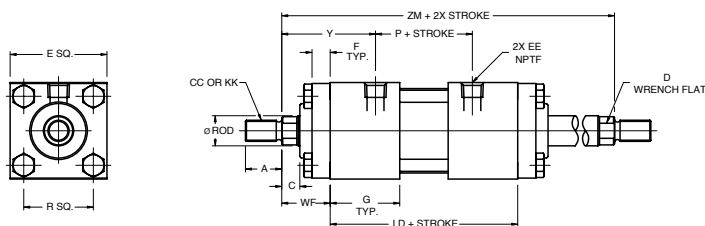

1-1/2" THRU 2-1/2" BORE

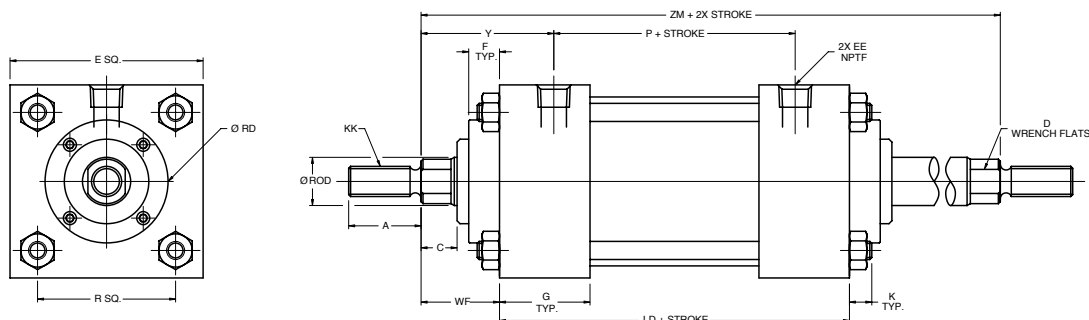

BORE	ROD	A	C	D	E	EE	F	G	K	KK	LD	P	R	SN*	SS*	RD	WF	Y	ZM
1-1/2	5/8	0.750	0.375	0.500	2.000	0.375	0.375	1.500	N/A	7/16-20	4.125	2.325	1.430	2.250	3.375	N/A	1.000	1.938	6.125
	1	1.125	0.500	0.813	2.000	0.250	0.375	1.500	N/A	3/4-16	4.125	1.965	1.430	2.250	3.375	N/A	1.375	2.460	6.875
2	5/8	0.750	0.375	0.500	2.500	0.375	0.375	1.500	N/A	7/16-20	4.125	2.250	1.840	2.250	3.375	N/A	1.000	1.938	6.152
	1	1.125	0.500	0.813	2.500	0.375	0.375	1.500	N/A	3/4-16	4.125	2.375	1.840	2.250	3.375	N/A	1.375	2.250	6.875
	1-3/8	1.625	0.625	1.125	2.500	0.375	0.375	1.500	N/A	1-14	4.125	2.250	1.840	2.250	3.375	N/A	1.625	2.500	7.375
2-1/2	5/8	0.750	0.375	0.500	3.000	0.375	0.375	1.500	N/A	7/16-20	4.250	2.375	2.190	2.375	3.500	N/A	1.000	1.813	6.250
	1	1.125	0.500	0.813	3.000	0.375	0.375	1.500	N/A	3/4-16	4.250	2.375	2.190	2.375	3.500	N/A	1.375	2.188	7.000
	1-3/8	1.625	0.625	1.125	3.000	0.375	0.375	1.500	N/A	1-14	4.250	2.375	2.190	2.375	3.500	N/A	1.625	2.438	7.500
	1-3/4	2.000	0.750	1.500	3.000	0.375	0.375	1.500	N/A	1 1/4-12	4.250	2.250	2.190	2.375	3.500	N/A	1.875	2.688	8.000
3-1/4	1	1.125	0.500	0.813	3.750	0.500	0.625	1.750	0.375	3/4-16	4.750	2.625	2.760	2.625	3.750	2.706	1.375	2.438	7.500
	1-3/8	1.625	0.625	1.125	3.750	0.500	0.625	1.750	0.375	1-14	4.750	2.625	2.760	2.625	3.750	3.110	1.625	2.688	8.000
	1-3/4	2.000	0.750	1.500	3.750	0.500	0.625	1.750	0.375	1 1/4-12	4.750	2.625	2.760	2.625	3.750	N/A	1.875	2.938	8.500
	2	2.250	0.875	1.750	3.750	0.500	0.625	1.750	0.375	1 1/2-12	4.750	2.625	2.760	2.625	3.750	N/A	2.000	3.063	8.750
	1	1.125	0.500	0.813	4.500	0.500	0.625	1.750	0.375	3/4-16	4.750	2.625	3.320	2.625	3.750	2.706	1.375	2.438	7.500
4	1-3/8	1.625	0.625	1.125	4.500	0.500	0.625	1.750	0.375	1-14	4.750	2.625	3.320	2.625	3.750	3.110	1.625	2.688	8.000
	1-3/4	2.000	0.750	1.500	4.500	0.500	0.625	1.750	0.375	1 1/4-12	4.750	2.625	3.320	2.625	3.750	3.788	1.875	2.938	8.500
	2	2.250	0.875	1.750	4.500	0.500	0.625	1.750	0.375	1 1/2-12	4.750	2.625	3.320	2.625	3.750	N/A	2.000	3.063	8.750
5	1	1.125	0.500	0.813	5.500	0.500	0.625	1.750	0.500	3/4-16	5.000	2.875	4.100	2.875	3.625	2.706	1.375	2.438	7.750
	1-3/8	1.625	0.625	1.125	5.500	0.500	0.625	1.750	0.500	1-14	5.000	2.875	4.100	2.875	3.625	3.110	1.625	2.688	8.250
	1-3/4	2.000	0.750	1.500	5.500	0.500	0.625	1.750	0.500	1 1/4-12	5.000	2.875	4.100	2.875	3.625	3.788	1.875	2.938	8.750
	2	2.250	0.875	1.750	5.500	0.500	0.625	1.750	0.500	1 1/2-12	5.000	2.875	4.100	2.875	3.625	4.250	2.000	3.063	9.000
	1-3/8	1.625	0.625	1.125	6.500	0.750	0.750	2.000	0.500	1-14	5.500	3.125	4.880	3.125	4.125	3.125	1.625	2.813	8.750
6	1-3/4	2.000	0.750	1.500	6.500	0.750	0.750	2.000	0.500	1 1/4-12	5.500	3.125	4.880	3.125	4.125	3.788	1.875	3.063	9.250
	2	2.250	0.875	1.750	6.500	0.750	0.750	2.000	0.500	1 1/2-12	5.500	3.125	4.880	3.125	4.125	4.250	2.000	3.188	9.500
	2-1/2	3.000	1.000	2.060	6.500	0.750	0.750	2.000	0.500	1 7/8-12	5.500	3.125	4.880	3.125	4.125	5.500	2.500	3.438	10.000


* For bottom tap and side lug.



ASP Series Steel Body NFPA

numatics®

Double Rod Mounts (continued)

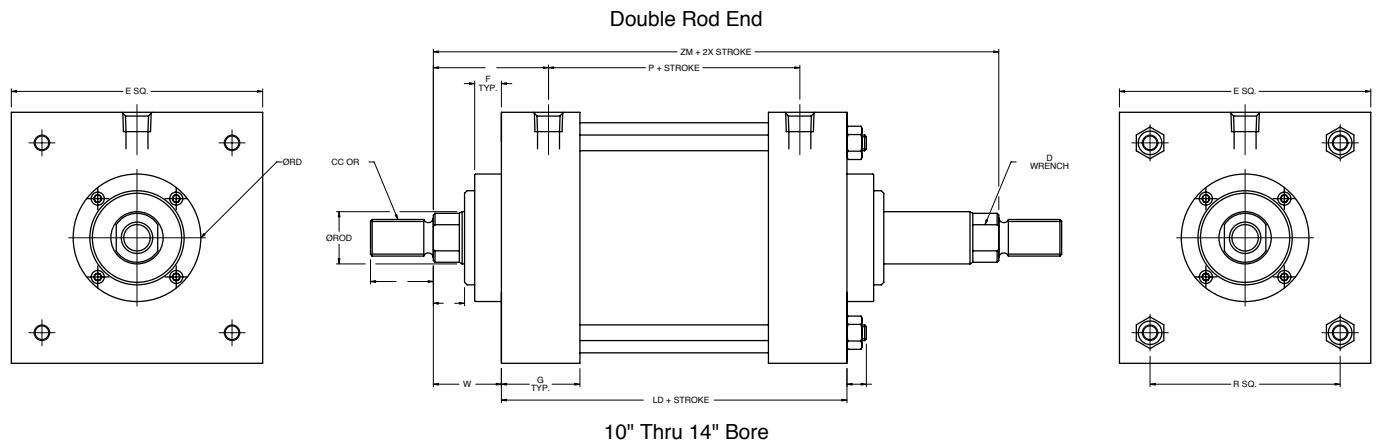


BORE	ROD	A	C	D	E	EE	F	G	K	KK	LD	P	R	SN*	SS*	RD	WF	Y	ZM
8	1-3/8	1.625	0.625	1.125	8.500	0.750	0.625	2.00	0.625	1-14	5.625	3.250	6.440	3.250	4.250	3.125	1.625	2.810	8.875
	1-3/4	2.000	0.750	1.500	8.500	0.750	0.750	2.00	0.625	1 1/4-12	5.625	3.250	6.440	3.250	4.250	3.788	1.875	3.060	9.375
	2	2.250	0.875	1.750	8.500	0.750	0.750	2.00	0.625	1 1/2-12	5.625	3.250	6.440	3.250	4.250	4.250	2.000	3.185	9.625
	2-1/2	3.000	1.000	2.060	8.500	0.750	0.750	2.00	0.625	1 7/8-12	5.625	3.250	6.440	3.250	4.250	5.500	2.250	3.435	10.125
10	1-3/4	2.000	0.750	1.500	10.625	1.000	0.750	2.25	0.750	1 1/4-12	6.625	4.125	8.063	4.125	4.875	3.788	1.875	3.125	10.375
	2	2.250	0.875	1.750	10.625	1.000	0.750	2.25	0.750	1 1/2-12	6.625	4.125	8.063	4.125	4.875	4.250	2.000	3.250	10.625
	2-1/2	3.000	1.000	2.060	10.625	1.000	0.750	2.25	0.750	1 7/8-12	6.625	4.125	8.063	4.125	4.875	5.500	2.250	3.500	11.125
	3	3.500	1.000	2.625	10.625	1.000	0.750	2.25	0.750	2 1/4-12	6.625	4.125	8.063	4.125	4.875	7.500	2.250	3.500	11.125
12	2	2.250	0.875	1.750	12.750	1.000	0.750	2.25	0.750	1 1/4-12	7.125	4.625	9.410	4.625	5.375	4.250	2.000	3.250	11.125
	2-1/2	3.000	1.000	2.060	12.750	1.000	0.750	2.25	0.750	1 1/2-12	7.125	4.625	9.410	4.625	5.375	5.500	2.250	3.500	11.625
	3	3.500	1.000	2.625	12.750	1.000	0.750	2.25	0.750	1 7/8-12	7.125	4.625	9.410	4.625	5.375	7.500	2.250	3.500	11.625
	3-1/2	3.500	1.000	3.000	12.750	1.000	0.750	2.25	0.750	2 1/4-12	7.125	4.625	9.410	4.625	5.375	7.500	2.250	3.500	11.625
14	2-1/2	3.000	1.000	2.060	14.750	1.250	0.750	2.75	0.875	1 7/8-12	8.625	5.500	10.900	5.500	6.375	5.500	2.250	3.810	13.125
	3	3.500	1.000	2.625	14.750	1.250	0.750	2.75	0.875	2 1/4-12	8.625	5.500	10.900	5.500	6.375	7.500	2.250	3.810	13.125
	3-1/2	3.500	1.000	3.000	14.750	1.250	0.750	2.75	0.875	2 1/2-12	8.625	5.500	10.900	5.500	6.375	7.500	2.250	3.810	13.125

* For bottom tap and side lug.



Cylinder Position Sensors ("Cylindicator Ready" Option)

The *In Force* Cylinder Line offers cylinder position sensing using inductive proximity switches. The steel tube construction does not enable the use of conventional pneumatic cylinder position sensing through magnetic field sensors. Inductive proximity sensors are commonly used on steel tube cylinders (both pneumatic and hydraulic). These sensors are typically mounted to the cylinder end caps via screws through spacers. The sensor determines end of stroke positioning by detecting the steel cushion sleeves (also know as cylinder spuds) as they pass beneath the sensor. There are two common types of sensors. The first is "No Stroke to Go." This is where the sensor is switched when the cylinder reaches end of stroke. The other type is "Stroke to Go." This is where the sensor is switched slightly before the cylinder reaches end of stroke. This is commonly utilized when a reduction of cycle time is desired. However, the timing is crucial and end of stroke may not be achieved soon enough after switching. *In Force* cylinders ordered with the "Cylindicator Ready" option includes the spacers and tapped holes necessary to mount to most common switches.

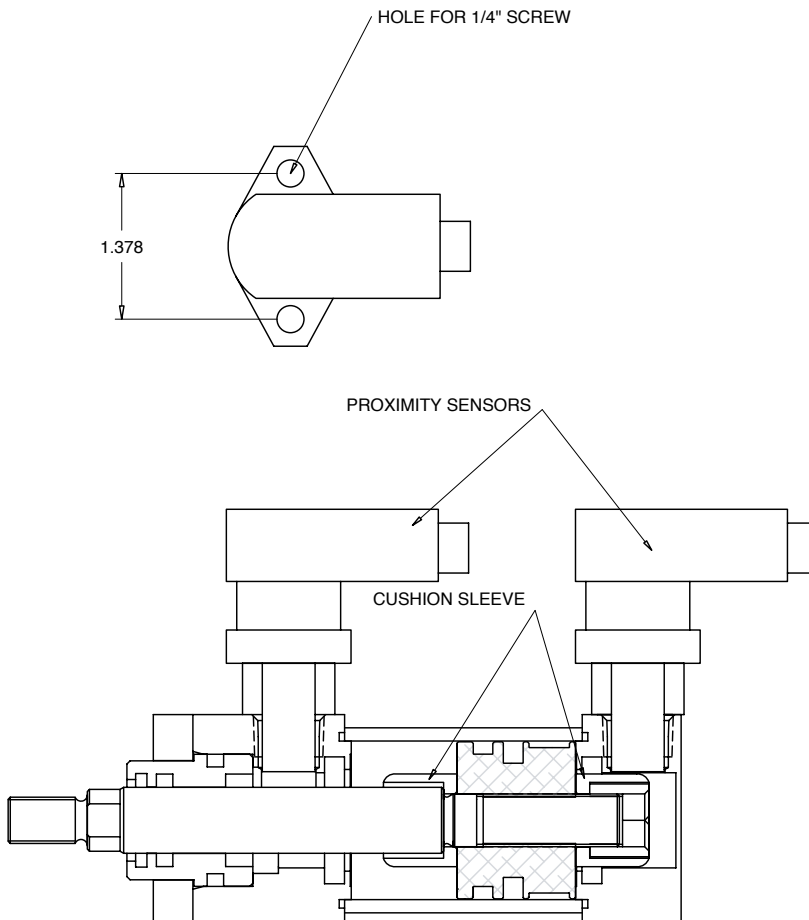

BORE	ROD DIAMETER	PROBE LENGTH
1-1/2	5/8	1.025
	1	N/A
2	5/8	1.250
	1	1.025
	1-3/8	1.025
2-1/2	5/8	2.062
	1	1.250
	1-3/8	1.025
3-1/4	1-3/4	1.025
	1	1.250
	1-3/8	1.250
	1-3/4	1.250
	2	1.025
4	1	2.062
	1-3/8	2.062
	1-3/4	2.062
	2	2.062
5	1	2.875
	1-3/8	2.062
	1-3/4	2.062
	2	2.062
6	1-3/8	2.875
	1-3/4	2.875
	2	2.875
	2-1/2	2.875
8	1-3/8	3.775
	1-3/4	3.775
	2	3.775
	2-1/2	3.775
10	1-3/4	4.560
	2	4.560
	2-1/2	4.560
	3	3.775
12	2	Special
	2-1/2	Special
	3	4.560
	3-1/2	Special
14	2-1/2	Special
	3	Special
	3-1/2	Special



ASP Series Steel Body NFPA

numatics®

How to Order - ASP Series **Repair Kit**

ASP98 - K 1 N - AA

Type

ASP98 = ASP Series Repair Kit

Bore

K = 1-1/2" U = 6"
L = 2" W = 8"
M = 2-1/2" X = 10"
P = 3-1/4" Y = 12"
R = 4" B = 14"
T = 5"

Rod Size

1 = 0.625"
2 = 1.000"
3 = 1.375"
4 = 1.750"
5 = 2.000"
6 = 2.500"
7 = 3.000"
8 = 3.500"

Options

AA = No Option
CR = Cylinder Ready "No Stroke to Go"
DA = Double Rod
EB = Silencer Bumpers
LB = Low Breakaway
MA = Metallic Rod Scraper
MB = Rear Metallic Rod Scraper
NA = Nickel Plated
NS = Cylinder Ready "Stroke to Go"
PA = Polypak Rod Seal
PB = Rear Polypak Rod Seal
PP = Polypak Piston Seals
RA = Save Air Stroke Adjust
TI = T-Seal Piston (10" - 14" bore only)
VA = Viton Seals
4D = Double Piston Stop Tube

Cushion

N = No Cushion
B = Both Ends Cushioned
H = Head End Cushioned
C = Cap End Cushioned

Note: Options listed are ones that apply to a repair kit only.

Model number is set up to use option code supplied with original cylinder or with any above.

How to Order - ASP Series **Seal Kit**

ASP98 - K 1 N - AA

Type

ASP98 = ASP Series Repair Kit

Bore

K = 1-1/2" U = 6"
L = 2" W = 8"
M = 2-1/2" X = 10"
P = 3-1/4" Y = 12"
R = 4" B = 14"
T = 5"

Rod Size

1 = 0.625"
2 = 1.000"
3 = 1.375"
4 = 1.750"
5 = 2.000"
6 = 2.500"
7 = 3.000"
8 = 3.500"

Options

AA = No Option
CR = Cylinder Ready "No Stroke to Go"
DA = Double Rod
EB = Silencer Bumpers
LB = Low Breakaway
MA = Metallic Rod Scraper
MB = Rear Metallic Rod Scraper
NA = Nickel Plated
NS = Cylinder Ready "Stroke to Go"
PA = Polypak Rod Seal
PB = Rear Polypak Rod Seal
PP = Polypak Piston Seals
RA = Save Air Stroke Adjust
TI = T-Seal Piston (10" - 14" bore only)
VA = Viton Seals
4D = Double Piston Stop Tube

Cushion

N = No Cushion
B = Both Ends Cushioned
H = Head End Cushioned
C = Cap End Cushioned

Note: Options listed are ones that apply to a repair kit only.

Model number is set up to use option code supplied with original cylinder or with any above.



Piston Rod Assembly Kit Removal/Installation Instructions

1. Loosen 4 Retainer Screws (Part #11) to remove Full Face Retainer (Part #10).
2. Loosen 4 Sleeve Nuts (Part #14) to remove Piston/Rod Assembly (Part #17, #18, #19, & #20)
3. Carefully remove old seals and wearband (Part #22, #23, & #24). Any damage to the seal may result in leakage.
4. Lubricate pistons seal(s) and Wearband (Part #22) with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
5. Install Piston Seal (Part #24). Make sure the piston seal is not twisted inside groove. Next install back-up rings (Part #23) if piston seal is a T-seal.
6. Install lubricated wearband onto piston. Sink piston/rod assembly into sinker tube. See Sinker Tube Part Numbers Chart.
7. Apply lube inside the cylinder tube.
8. Sink piston/rod assembly into cylinder tube.
9. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
10. Examine all seals after installing for any contamination. Contamination may cause leakage.
11. Lightly grease Rod Seal (Part #2) and Bushing O-ring (Part #3) of Loaded bushing (Part #5) before installation. This will ease the installation of the rod bushing over the rod.
12. Assemble cylinder. First, loosely torque sleeve nuts to allow head and cap to rotate slightly. Before final torque, place cylinder on level surface to square head and cap. Torque sleeve nuts in a crisscross pattern. Use the following charts for torque tolerances.
13. Place full face retainer over bushing. Tighten retainer screws. Use torque tolerance charts for specific torque informations.
14. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 12-14.

See Seal Installation Guide on page 39 for additional (visual) instructions.

NOTE: Depending on bore and/or rod size, the cylinder may not have full face retainer.

Repair Kit and Seal Kit Removal/Installation Instructions

1. Loosen 4 Retainer Screws (Part #11) to remove Full Face Retainer (Part #10) and Loaded Bushing (Part # 5).
2. Loosen 4 Sleeve Nuts (Part #14) to remove Piston/Rod Assembly (Part #17, #18, #19, & #20)
3. Carefully remove old seals and wearband (Part [#1, #2, #3 Seal Kit only], #8, #9, #22, #23, & #24). Any damage to the seal grooves may result in leakage.
4. Lubricate new seals and Wearband (Part #22) with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
5. Install Piston Seal (Part #24). Make sure the piston seal is not twisted inside groove. Next install back-up rings (Part #23) if piston seal is a T-seal.
6. Install lubricated wearband onto piston. Sink piston/rod assembly into sinker tube. See Sinker Tube Part Numbers Chart.
7. Apply lube inside the cylinder tube.
8. Sink piston/rod assembly into cylinder tube.
9. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
10. Place Tube End Seals (Part #8) into head and cap seal grooves. Examine seals after installing for any contamination. Contamination may cause leakage.
11. Install Rod Wiper (Part #1), Rod Seal (Part #2), and Bushing O-ring (Part #3) into bushing (Seal Kit only). Lightly grease Rod Seal and Bushing O-ring after installation. This will ease the installation of the rod bushing over the rod and into the head.
12. Assemble cylinder except for loaded bushing. First, loosely torque sleeve nuts to allow head and cap to rotate slightly. Carefully place bushing over the rod until getting interference. With a twisting motion, slide the bushing down onto the rod and into the bushing pocket on the head.
13. Before final torque, place cylinder on level surface to square head and cap. Torque sleeve nuts in a crisscross pattern. Use the following charts for torque tolerances.
14. Place full face retainer over bushing. Tighten retainer screws. Use torque tolerance charts for specific torque informations..
15. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 12-14.

See Seal Installation Guide on page 39 for additional (visual) instructions.

NOTE: Depending on bore and/or rod size, the cylinder may not have full face retainer.



ASP Series Steel Body NFPA


numatics®

Diagrams


Pneumatic Service Temperatures:

Nitrile Seals: -10°F (-23°C) to 165°F (74°C)

Viton® Seals: 0°F (-17°C) to 400°F (204°C)

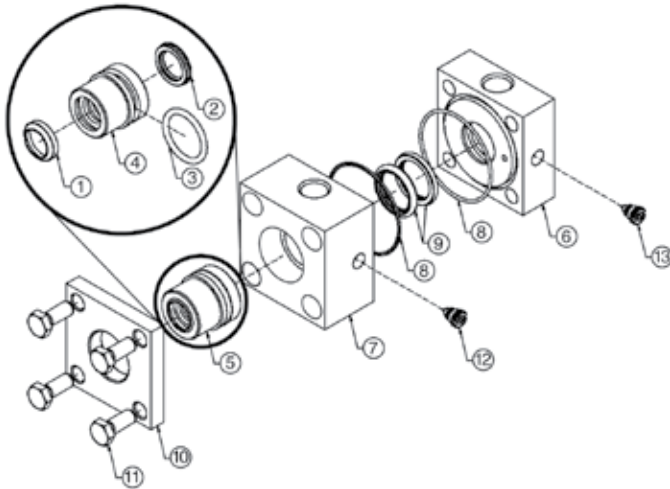


Head, Cap, and Bushing Assembly

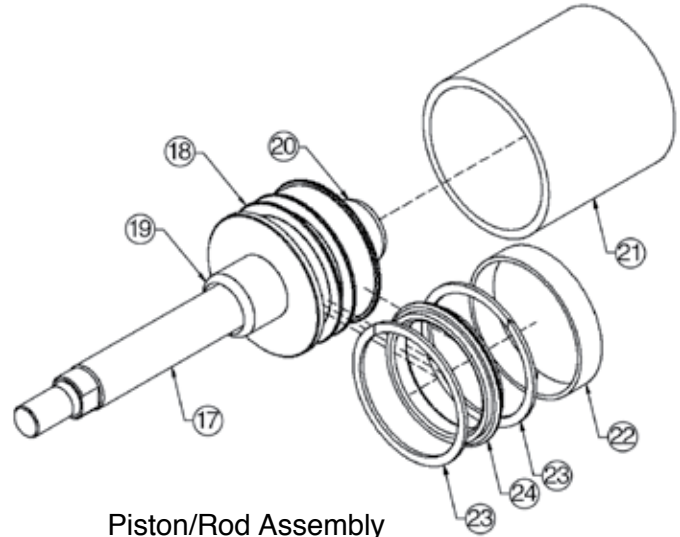

Piston/Rod Assembly

ASP Series

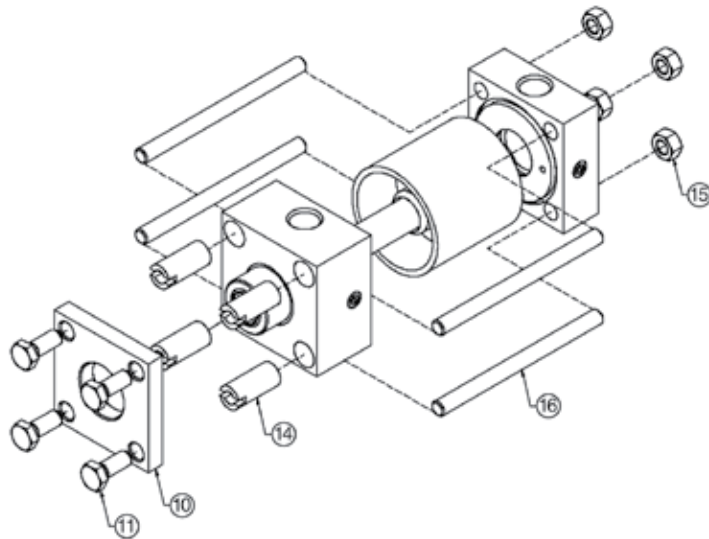


Cylinder Assembly and Tie Rod Torque


Part #	Description	Parts included in:		
		Seal Kit	Repair Kit	Piston/Rod Assembly
1	Rod Wiper	X		
2	Rod Seal	X		
3	Bushing O-ring	X		
4	Bushing			
5	Loaded Bushing Assembly		X	
6	Cap			
7	Head			
8	Tube End Seals	X	X	
9	Head and Cap Cushion Seals	X	X	
10	Bushing Retainer			
11	Retainer Screws			
12	Head Cushion Needle			
13	Cap Cushion Needle			
14	Sleeve Nuts			
15	Hex Nuts			
16	Tie Rods			
17	Rod			X
18	Piston			X
19	Head Cushion Spear			X
20	Cap Cushion Spear			X
21	Tube			
22	Wearband	X	X	
23	Back-up Rings	X	X	
24	Piston Seal	X	X	




Seal Installation Guide




Loaded Bushing



Cushioned Head or Cap



Low Breakaway Piston



T-Seal Piston

Torque Tolerances (lbs-ft) Tie Rod Nut and Sleeve Nut Part #14 & #15

Bore	Min.	Max.
1-1/2"	8	10
2"	15	20
2-1/2"	15	20
3-1/4"	23	30
4"	23	30
5"	50	60
6"	50	60
8"	80	90
10"	200	220
12"	200	220
14"	300	330

Retainer Screws Torque Tolerances (lbs-ft) Part #11

Size	Min.	Max.
#10-32	1	1.5
1/4-28	5	7
5/16-24	10	12
1/2-20	15	20


Note: Sinker Tubes are not included in kits.
They can be ordered using the part numbers
from the provided chart.

Sinker Tube Part Numbers

Bore	Part #
1-1/2"	A06-K91
2"	A06-L91
2-1/2"	A06-M91
3-1/4"	A06-P91
4"	A06-R91
5"	A06-T91
6"	A06-U91
8"	A06-W91
10"	A06-X91
12"	A06-Y91
14"	A06-B91

NUMATICS

*World Class Supplier
of Pneumatic Components*

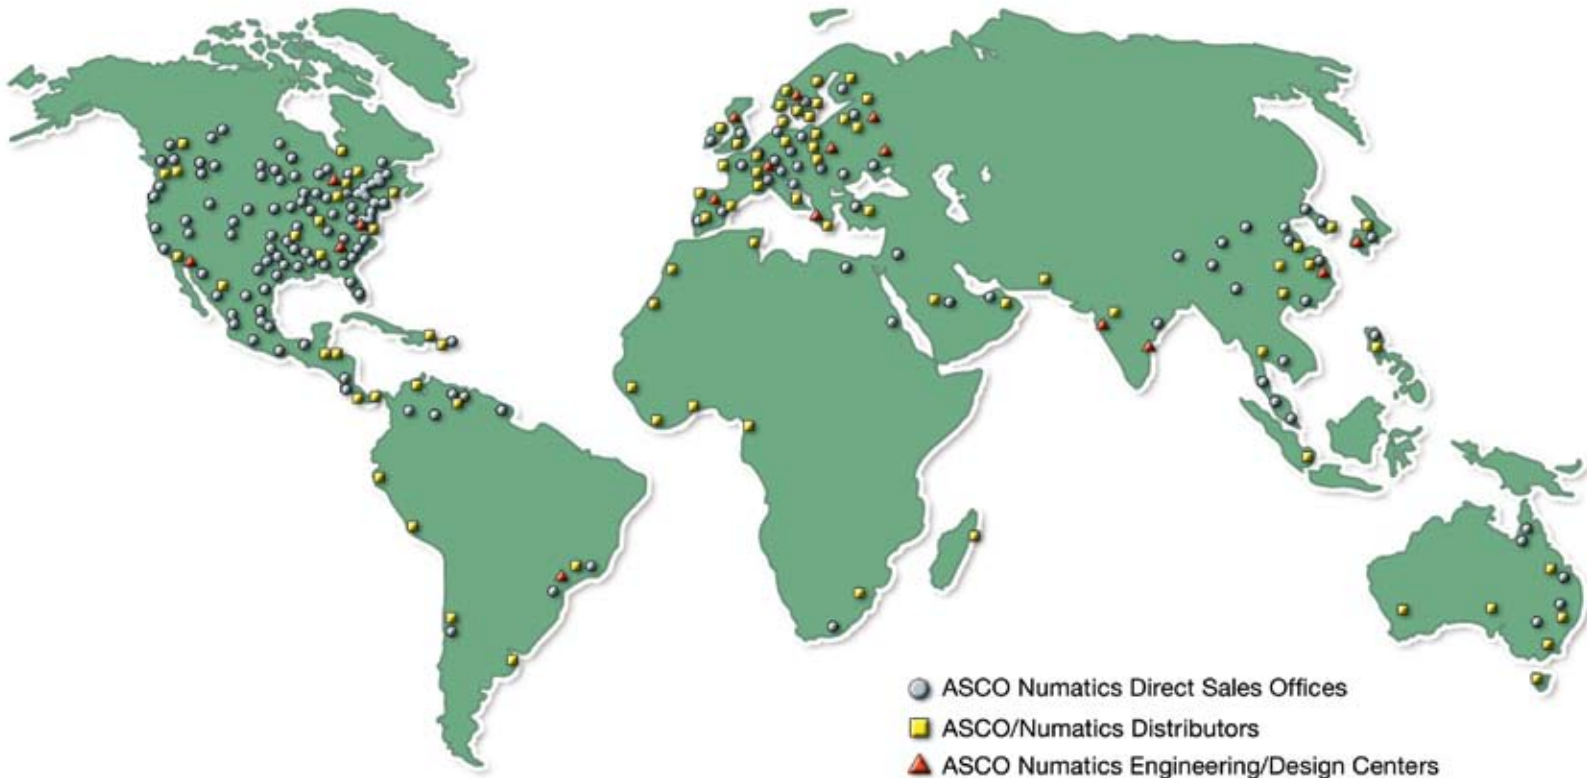

WORLD HEADQUARTERS

USA

Numatics, Incorporated

46280 Dylan Drive
Novi, Michigan 48377

P: 1-888-Numatics
1-888-686-2842

Canada

Numatics, Ltd

P: 519-452-1777

Mexico

Numatics de Mexico S.A. de C.V.

P: 52-222-284-6176

For a comprehensive listing of all Numatics production and distribution facilities worldwide, visit:

www.numatics.com