

Direct Mounted NAMUR Solenoid Valves

Solenoid General Specifications:

Temperature limits:

Media: 0°F to +180°F.

Ambient:

1: NEMA 4, 4X 0°F to +180°F.

2: NEMA 4-4X-7-9, 0°F to +125°F.

Coil Ratings:

1: NEMA 4, 4X: Continuous duty molded Class H insulation.

2: NEMA 4-4X-7-9: Continuous duty molded Class F

Coil Voltages Available:

Coil Voltage Variation: +/-10% of Nominal

1: 120 VAC-60 Hz/110 VAC-50 Hz.

2: 240 VAC-60 Hz/220 VAC-50 Hz/120 VDC.

3: 48 VAC-60 Hz/44 VAC-50 Hz/24 VDC.

4: 24 VAC-60 Hz/22 VAC-50 Hz/12 VDC.

Power Consumption: 6 Watts

Materials:




Valve Body=Aluminum, anodized.

Fasteners=Stainless Steel




Seals & O-Rings=Nitrile.

Cv flow rate = 1.8

NEMA 4-4X UL, CSA, PTB&CE

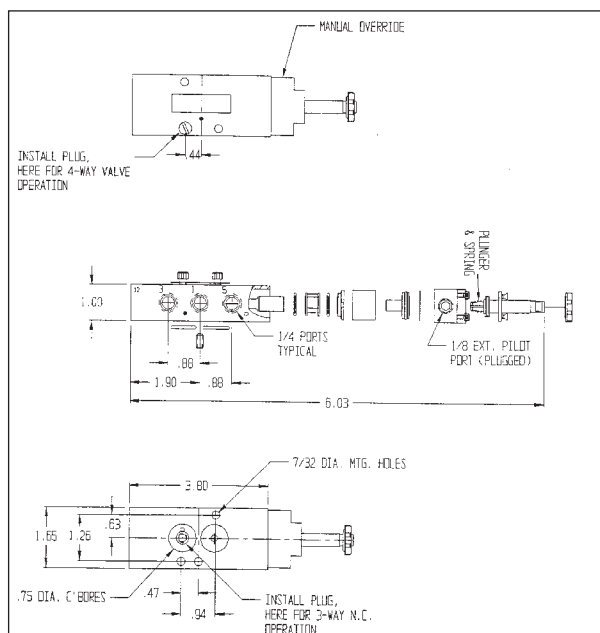

NEMA 4, 4X, 7 & 9 UL, CSA, PTB&CE

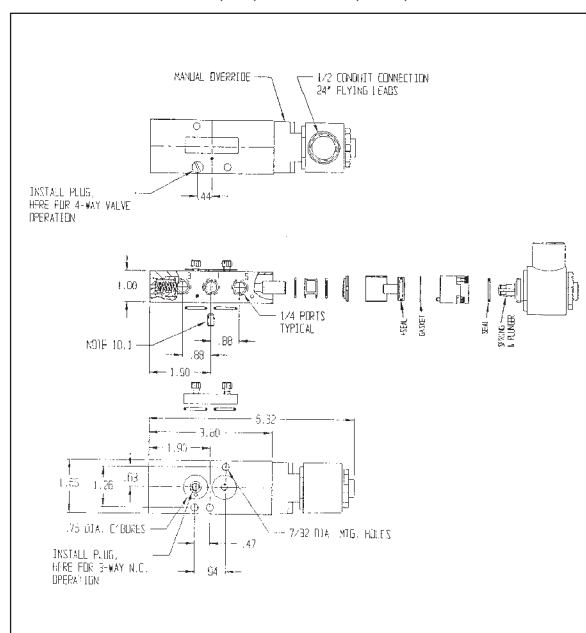

AVC NAMUR *Three & Four Way, End Mounted Coil Solenoids

3T8-411-10	115 VAC NEMA 4	ADO32 only	3T8-411-20	115 VAC NEMA 4	052 thru 270
3T8-421-10	12 VDC/24 VAC NEMA4	ADO32 only	3T8-421-20	12 VDC/24 VAC NEMA4	052 thru 270
3T8-431-10	24 VDC/48 VAC NEMA4	ADO32 only	3T8-431-20	24 VDC/48 VAC NEMA4	052 thru 270
3T8-441-10	220 VAC NEMA4	ADO32 only	3T8-441-20	220 VAC NEMA4	052 thru 270
3T8-711-10	115 VAC NEMA7	ADO32 only	3T8-711-20	115 VAC NEMA7	052 thru 270
3T8-721-10	12 VDC/24 VAC NEMA7	ADO32 only	3T8-721-20	12 VDC/24 VAC NEMA7	052 thru 270
3T8-731-10	24 VDC/48 VAC NEMA7	ADO32 only	3T8-731-20	24 VDC/48 VAC NEMA7	052 thru 270
3T8-741-10	220 VAC NEMA7	ADO32 only	3T8-741-20	220 VAC NEMA7	052 thru 270

All above include adapters to turn "NAMUR 90°"

All are direct mount NAMUR - no adapter necessary