



# MODEL 910F

## CLASS 125 SWING CHECK VALVE

<b>Job Name:</b>	<b>Contractor:</b>
<b>Job Location:</b>	<b>P.O. Number:</b>
<b>Engineer:</b>	<b>Representative:</b>
<b>Tag:</b>	<b>Wholesale Distributor:</b>

### Description

The Apollo Model 910F Flanged Cast Iron Swing Check valve provides full flow capabilities. It provides reliable and economical protection against reverse flow. The Apollo Swing Check valve can reliably be installed in most plumbing and heating systems (or building service piping).

### Features

- Compatible with ANSI 125# & 150# Flanges
- Full Port
- Minimal Pressure Drop
- Flanged Connection
- Bolted Bonnet
- Integral Bronze Seat

### Standards

- MSS SP-71, "Gray Iron Swing Check Valves Flanged and Threaded"
- ASME B16.10, "Face-to-Face and End-to-End Dimensions of Valves"

### Performance Rating

**Saturated Steam:** 125 psi (8.6 Bar) to 353°F(178°C) (2"-12")  
100 psi (6.9 Bar) to 338°F(170°C) (14"-20")

**Cold Working Pressure:** 200 psi (13.8 Bar) at 100°F (2"-12")  
150 psi (10.3 Bar) at 100°F (14"-20")

**Temperature Range:** -20°F to 406°F



### Order Information

SIZE	PART NUMBER
□ 2"	6SC108B1
□ 2.5"	6SC109B1
□ 3"	6SC100B1
□ 4"	6SC10AB1
□ 5"	6SC10BB1
□ 6"	6SC10CB1
□ 8"	6SC10E01
□ 10"	6SC10G01
□ 12"	6SC10H01
□ 14"	6SC10J01
□ 16"	6SC10K01
□ 18"	6SC10M01
□ 20"	6SC10N01

### Material Specifications

PART	MATERIAL
BOLTS	STEEL (ASTM A307 B)
NAMEPLATE	ALUMINUM
BONNET	CAST IRON (ASTM A126 CL B)
BODY GASKET	GRAPHITE
NUTS	STEEL (ASTM A307 B)
SIDE PLUG	BRASS (ASTM B16)
GASKET	GRAPHITE
HANGER PIN	BRASS (ASTM B16)
HANGER	DUCTILE IRON (ASTM A536 65-45-12)
DISC RING	CAST BRONZE (2"-6")-CAST IRON (8"-20")
DISC	CAST IRON (ASTM A126 CL B)
WASHER	STEEL (ASTM A307 B)
SPLIT PIN	STAINLESS STEEL (ASTM 420 S42000)
SEAT RING	CAST BRONZE (2"-6")-CAST IRON (8"-20")
BODY	CAST IRON (ASTM A126 CL B)
DISC NUT	STEEL (ASTM A307 B)
STUD BOLT	STEEL (ASTM A307 B)

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA ; [www.apollovalves.com](http://www.apollovalves.com) ; 704-841-6000


Conbraco Industries can accept no responsibility for possible errors in this document and reserves the right to alter its product design or construction without notice and without incurring any obligation to make such changes on Conbraco products previously or subsequently sold. All product specifications are approximate and are provided for reference only.



# MODEL 910F

## CLASS 125 SWING CHECK VALVE

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

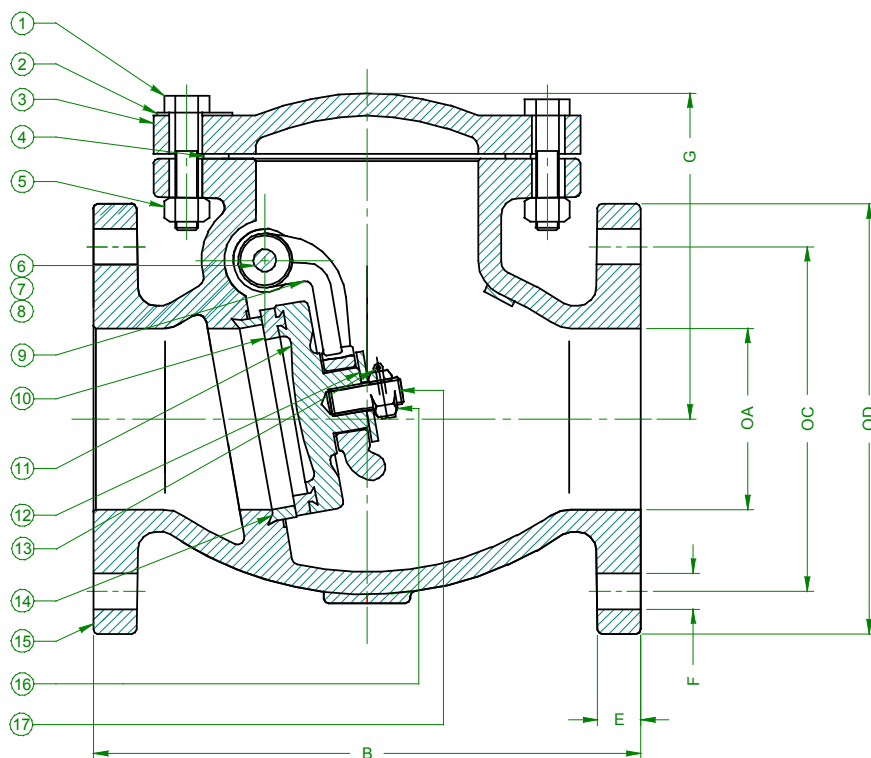

SIZE	A	B	C	D	E	F	G	WT(LBS)
2"	2.00	8.00	4.75	6.00	0.62	0.75	4.41	26
2.5"	2.50	8.50	5.50	7.00	0.69	0.75	5.24	39
3"	3.00	9.50	6.00	7.50	0.75	0.75	5.67	47
4"	4.00	11.50	7.50	9.00	0.94	0.75	6.61	82
5"	5.00	13.00	8.50	10.00	0.94	0.88	7.80	124
6"	6.00	14.00	9.50	11.00	1.00	0.88	8.54	160
8"	8.00	19.50	11.75	13.50	1.12	0.88	10.28	271
10"	10.00	24.50	14.25	16.00	1.19	1.00	11.30	437
12"	12.00	27.50	17.00	19.00	1.25	1.00	12.56	644
14"	14.00	31.00	18.75	21.00	1.38	1.14	17.50	950
16"	16.00	36.00	21.25	23.50	1.44	1.14	23.45	1160
18"	18.00	36.00	22.75	25.00	1.56	1.25	27.50	1720
20"	20.00	40.00	25.00	27.50	1.69	1.25	29.25	2094

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA ; [www.apollovalves.com](http://www.apollovalves.com) ; 704-841-6000

Conbraco Industries can accept no responsibility for possible errors in this document and reserves the right to alter its product design or construction without notice and without incurring any obligation to make such changes on Conbraco products previously or subsequently sold. All product specifications are approximate and are provided for reference only.



# MODEL 910F

## CLASS 125 SWING CHECK VALVE

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA ; [www.apollovalves.com](http://www.apollovalves.com) ; 704-841-6000

Conbraco Industries can accept no responsibility for possible errors in this document and reserves the right to alter its product design or construction without notice and without incurring any obligation to make such changes on Conbraco products previously or subsequently sold. All product specifications are approximate and are provided for reference only.