



70-600-10 Three-Way Diverter Valve



Overview

Fuel tank selection, oil transfer, and water tank selection are only a few of the uses for this versatile diverter valve. Available in sizes 1/2" - 2".


Features

- Bronze body.
- Chromium Plated Ball.
- Reinforced RPTFE Seats And Stuffing Box Ring.
- Stainless Steel Lever and Nut.
- Mounting/Bonding Pads.
- Blow-Out Proof Stem Design.
- 400 PSIG service rating.
- Adjustable Packing Gland.

Options

- Also available in all Stainless Steel. Specify 76-600 series.

Dimensions

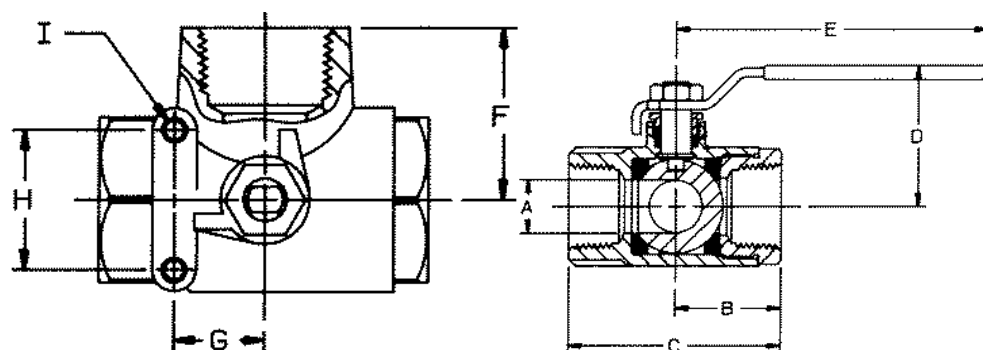

Number	Size	A	B	C	D	E	F	G	H	I (Tapping)	WT/100 lb./kg.
	in./mm.	in./mm.	in./mm.	in./mm.	in./mm.	in./mm.	in./mm.	in./mm.	in./mm.		
70-603-10	1/2 15	0.500 12.700	1.090 27.686	2.250 57.150	1.750 44.450	3.870 98.298	1.180 29.972	0.870 22.098	1.370 34.798	10-24	76 34.473
70-604-10	3/4 20	0.680 17.272	1.500 38.100	3.000 76.200	2.120 53.848	4.870 123.698	1.620 41.148	0.870 22.098	1.370 34.798	10-24	231 104.780
70-605-10	1 25	0.810 20.574	1.590 40.386	3.180 80.772	2.250 57.150	4.870 123.698	1.710 43.434	0.870 22.098	1.370 34.798	10- 24	204 92.533
70-606-10	1-1/4 32	1.000 25.400	1.970 50.038	3.950 100.330	2.690 68.326	5.500 139.700	2.010 51.054	0.930 23.622	1.500 38.100	1/4-20	385 174.633
70-607-10	1-1/2 40	1.250 31.750	2.210 56.134	4.400 111.760	2.870 72.898	5.500 139.700	2.380 60.452	0.940 23.876	1.500 38.100	1/4- 20	522 236.775
70-608-10	2 50	1.500 38.100	2.340 59.436	4.690 119.126	3.000 76.200	5.500 139.700	2.500 63.500	0.940 23.876	1.500 38.100	1/4-20	620 281.227

Note: Open port pressure must exceed closed port pressure