



78-124 & 78-125

Bronze 5-Port Fuel Selector Ball Valve


Threaded. 50 psig WOG.

FEATURES

- SS lever and nut
- RPTFE bearing and packing
- Non-lubricated design
- Operation: Four selected inlets feed on common outlet - pointer on handle indicates the selected inlet
- Blow-out-proof stem design
- Adjustable packing gland
- PTFE seats

STANDARD MATERIAL LIST

1. Lever and grip	304 SS w/vinyl
2. Stem packing	RPTFE
3. Stem bearing	RPTFE
4. Ball	B16, chrome plated
5. Seat (4)	PTFE
6. Gland nut	B16
7. Stem	B16
8. Lever nut	304 SS
9. Retainer (3)	B16
10. Body	B584-C84400

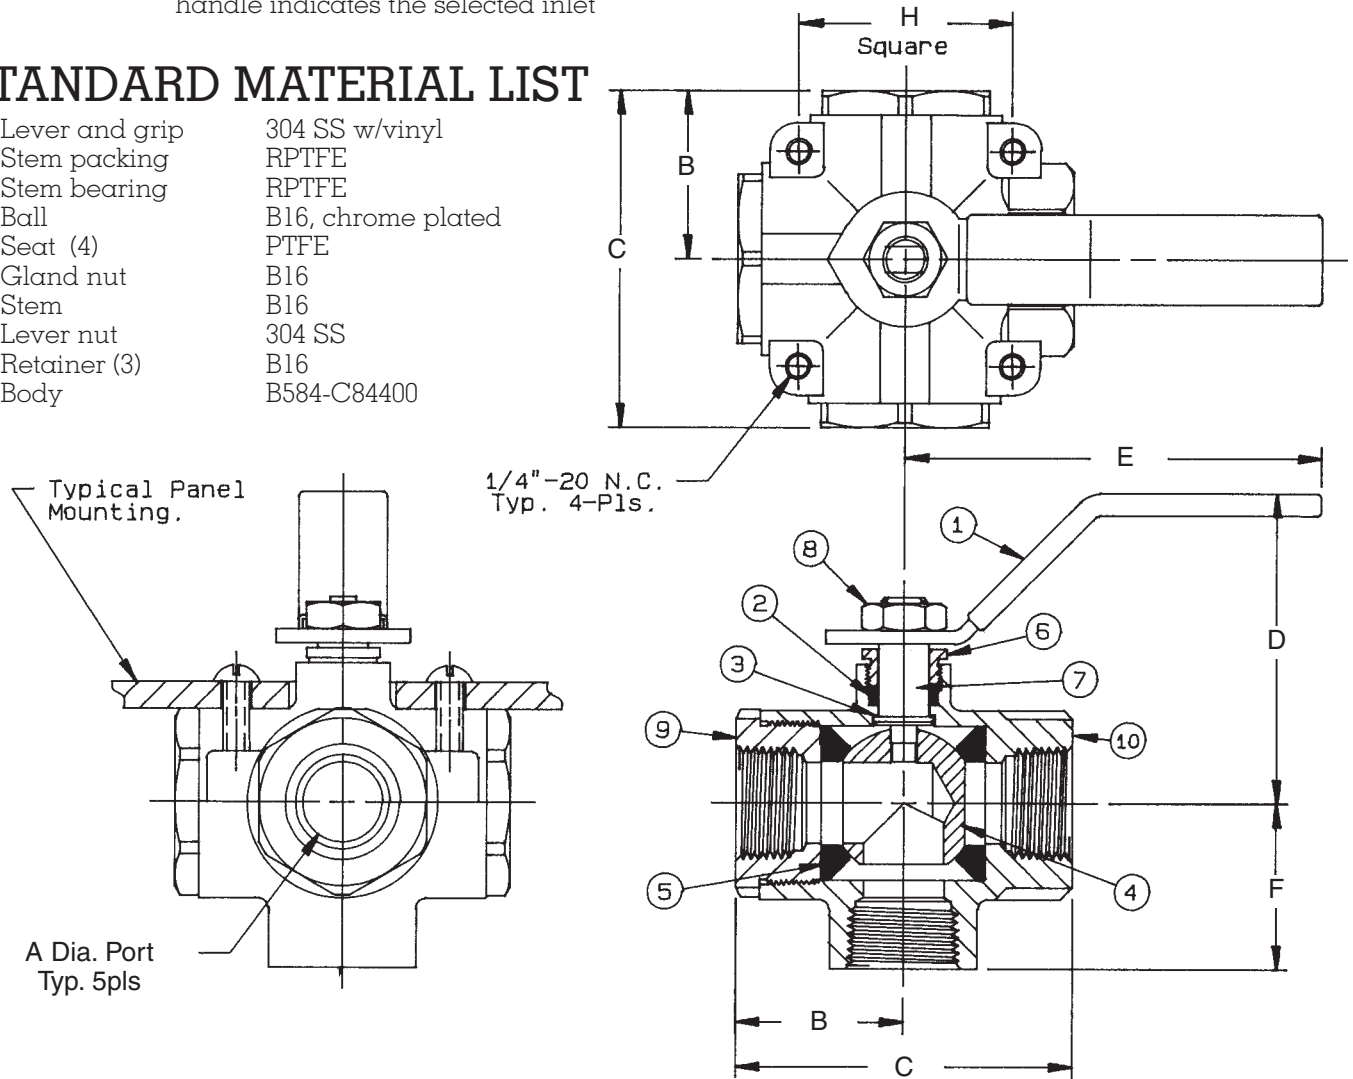

BRONZE 5-PORT FUEL SELECTOR BALL VALVE

NUMBER	SIZE	A	B	C	D	E	F	G	H	Wt./100
78-124-01	1/2"	.50	1.26	2.52	2.27	3.53	1.12	10-24	1.40	106
78-125-01A	3/4"	.75	1.53	3.12	2.87	3.87	1.53	1/4-20	1.98	264